

HOW TO USE THIS PAMPHLET

The secret to successfully earning a merit badge is to use both the pamphlet and the suggestions of your counselor.

Your counselor can be as important to you as a coach is to an athlete. Use all of the resources your counselor can make available to you.

This may be the best chance you will have to learn about this particular subject. Make it count.

If you or your counselor feels that any information in this pamphlet is incorrect, please let us know. Please state your source of information.

Merit badge pamphlets are reprinted annually and requirements are updated regularly. Your suggestions for improvement are welcome.

Send comments along with a brief statement about yourself to National Merit Badge Commission, 5209 • Boy Scouts of America • 1325 Walnut Hill Lane • P.O. Box 152079 • Irving, TX 75015-2079 • merit.badge@Scouting.org.

WHO PAYS FOR THIS PAMPHLET?

This merit badge pamphlet is one in a series of more than 100 covering all kinds of hobby and career subjects. It is made available for you to buy as a service of the national and local councils, Boy Scouts of America. The costs of the development, writing, and editing of the merit badge pamphlets are paid for by the Boy Scouts of America in order to bring you the best book at a reasonable price.

BOY SCOUTS OF AMERICA
MERIT BADGE SERIES

METALWORK



"Enhancing our youths' competitive edge through merit badges"



BOY SCOUTS OF AMERICA

Note to the Counselor

The Metalwork merit badge offers Boy Scouts a fun way to learn about metalworking disciplines. The four options in this pamphlet were selected because they can be offered at any Boy Scout summer camp that schedules five two-hour sessions for this merit badge.

There is no need to make all four metalworking options available during a Scout's summer camp experience. If finding a counselor for each of the options proves to be too difficult, or if providing all of the tools and materials is too costly, select one option and do it well.


The projects in this pamphlet are offered as guidelines only. If you have favorite projects that can be readily completed by Scouts, feel free to use them. You are encouraged to help enrich each Scout's experience by drawing upon your professional knowledge and experience, but remember that a merit badge counselor may neither add nor delete requirements, nor simplify or make requirements more difficult than stated.

Scouts working on this merit badge require direct adult supervision. A sheet metal burr can cause a cut, molten pewter and orange-hot steel can cause severe burns, and the sulfuric acid silversmiths use to pickle their silver can be dangerous to anyone if used improperly. Work in groups no larger than two to three Scouts per merit badge counselor.

Some of the tools described in this pamphlet are those collected by professional metalworkers throughout their years of experience. Many metalworking professionals continue to practice their trade with a minimal use of power tools. To earn this merit badge, Scouts need learn to use only a few basic tools that they should be able to borrow from a more experienced metalworker. If a Scout develops greater interest in the craft and desires to further the hobby outside the requirements of the Metalwork merit badge, he can begin to collect his own set of tools.

Requirements

1. Read the safety rules for metalwork. Discuss how to be safe while working with metal. Discuss with your counselor the additional safety rules that apply to the metalwork option you choose for requirement 5.
2. Define the terms native metal, malleable, metallurgy, alloy, nonferrous, and ferrous. Then do the following:
 - a. Name two nonferrous alloys used by pre-Iron Age metalworkers. Name the metals that are combined to form these alloys.
 - b. Name three ferrous alloys used by modern metalworkers.
 - c. Describe how to work-harden a metal.
 - d. Describe how to anneal a nonferrous and a ferrous metal.
3. Do the following:
 - a. Work-harden a piece of 26- or 28-gauge sheet brass or sheet copper. Put a 45-degree bend in the metal, then heavilypeen the area along the bend line to work-harden it. Note the amount of effort that is required to overcome the yield point in this unworked piece of metal.
 - b. Soften the work-hardened piece from requirement 3a by annealing it, and then try to remove the 45-degree bend. Note the amount of effort that is required to overcome the yield point.
 - c. Make a temper color index from a flat piece of steel. Using hand tools, make and temper a center punch of medium-carbon or high-carbon steel.



4. Find out about three career opportunities in metalworking. Pick one and find out the education, training, and experience required for this profession. Discuss this with your counselor, and explain why this profession might interest you.
5. After completing the first four requirements, complete at least ONE of the options listed below.

a. Option 1—Sheet Metal Mechanic/Tinsmith

- 1) Name and describe the use of the basic sheet metalworking tools.
- 2) Create a sketch of two objects to make from sheet metal. Include each component's dimensions on your sketch, which need not be to scale.
- 3) Make two objects out of 24- or 26-gauge sheet metal. Use patterns either provided by your counselor or made by you and approved by your counselor. Construct these objects using a metal that is appropriate to the object's ultimate purpose, and using cutting, bending, edging, and either soldering or brazing.
 - a) One object also must include at least one riveted component.
 - b) If you do not make your objects from zinc-plated sheet steel or tin-plated sheet steel, preserve your work from oxidation.




b. Option 2—Silversmith

- 1) Name and describe the use of a silversmith's basic tools.
- 2) Create a sketch of two objects to make from sheet silver. Include each component's dimensions on your sketch, which need not be to scale.
- 3) Make two objects out of 18- or 20-gauge sheet copper. Use patterns either provided by your counselor or made by you and approved by your counselor. Both objects must include a soldered joint. If you have prior silversmithing experience, you may substitute sterling silver, nickel silver, or lead-free pewter.
 - a) At least one object must include a sawed component you have made yourself.
 - b) At least one object must include a sunken part you have made yourself.
 - c) Clean and polish your objects.



c. Option 3—Founder


- 1) Name and describe the use of the basic parts of a two-piece mold. Name at least three different types of molds.
- 2) Create a sketch of two objects to cast in metal. Include each component's dimensions on your sketch, which need not be to scale.
- 3) Make two molds, one using a pattern provided by your counselor and another one you have made yourself that has been approved by your counselor. Position the pouring gate and vents yourself. *Do not use copyrighted materials as patterns.*
 - a) Using lead-free pewter, make a casting using a mold provided by your counselor.
 - b) Using lead-free pewter, make a casting using the mold that you have made.

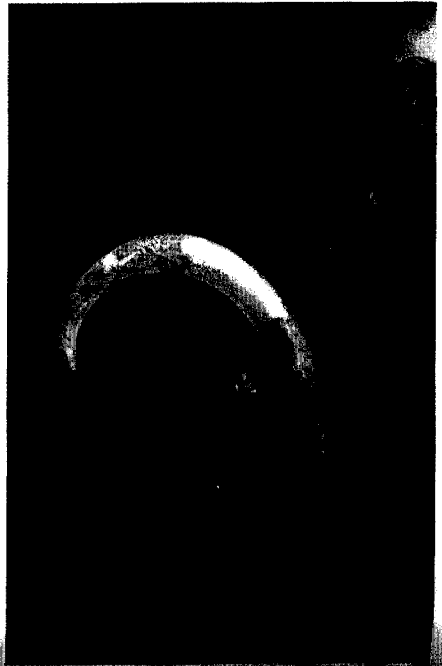

d. Option 4—Blacksmith

- 1) Name and describe the use of a blacksmith's basic tools.
- 2) Make a sketch of two objects to hot-forge. Include each component's dimensions on your sketch, which need not be to scale.
- 3) Using low-carbon steel at least $\frac{1}{4}$ inch thick, perform the following exercises:
 - a) Draw out by forging a taper.
 - b) Use the horn of the anvil by forging a U-shaped bend.
 - c) Form a decorative twist in a piece of square steel.
 - d) Use the edge of the anvil to bend metal by forging an L-shaped bend.
- 4) Using low-carbon steel at least $\frac{1}{4}$ inch thick, make the two objects you sketched that require hot-forging. Be sure you have your counselor's approval before you begin.
 - a) Include a decorative twist on one object.
 - b) Include a hammer-riveted joint in one object.
 - c) Preserve your work from oxidation.

Contents	
Introduction	9
The Basics of Metalworking	15
The Sheet Metal Mechanic/Junior	35
The Smith	47
The Forger	61
The Blacksmith	83
Careers in Metalworking	85
Glossary	89
Metalwork Resources	94

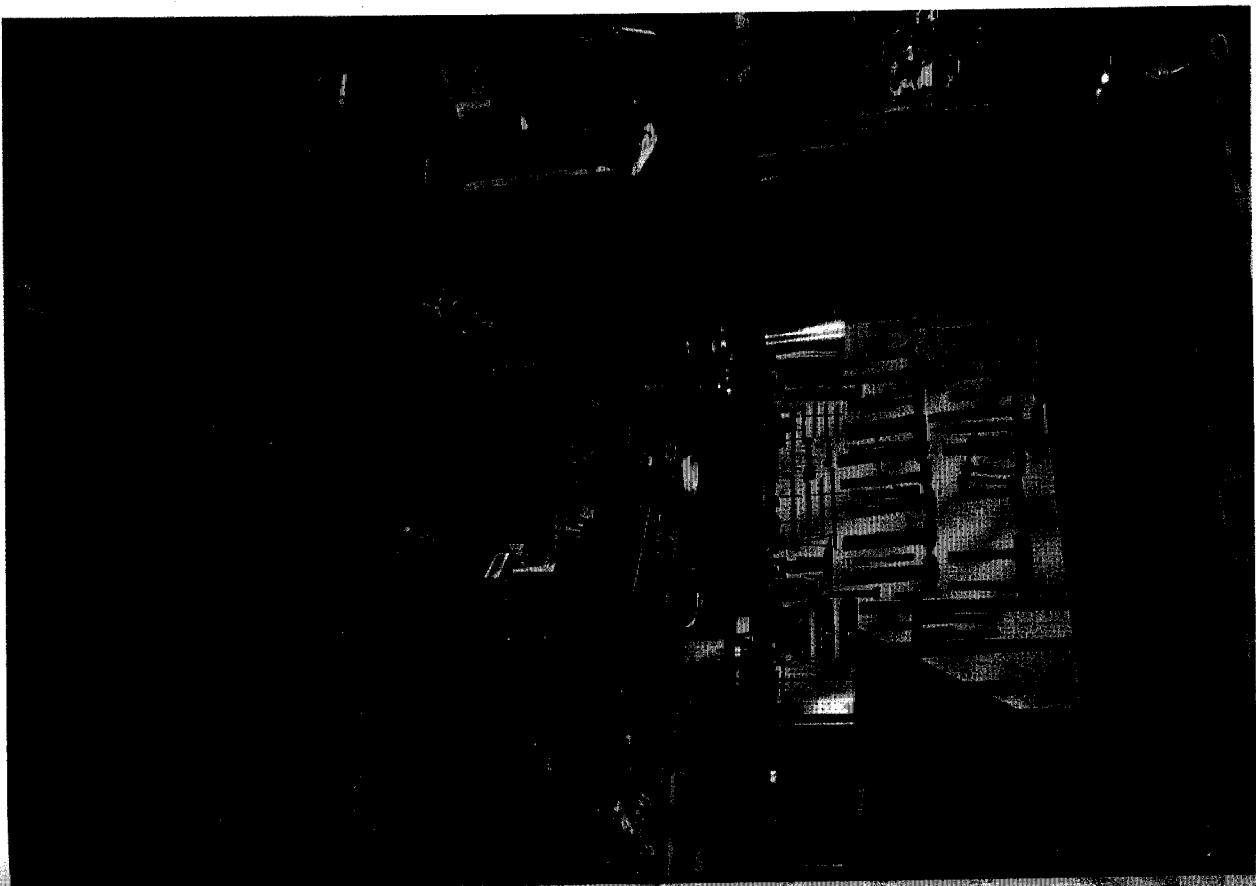



Introduction

Mastering the metalworker's craft cannot happen overnight. Learning the skills and techniques of a metalworker requires knowledge of the basics—and lots of practice.

You will begin your work on this merit badge by learning about the properties of *metal*, how to use simple metalworking tools, and the basic metalworking techniques. Then you will practice using these tools and techniques before concentrating on the more intricate skills of one of the four metalworking options offered for the Metalwork merit badge:

- Sheet metal mechanic/tinsmith
- Silversmith
- Founder
- Blacksmith

Sheet metal mechanics, or tinsmiths, work by bending thin sheets of metal then *soldering* the component parts together. Silversmiths hammer and cut thin sheets of metal into gracefully shaped components and then solder the parts together. Founders pour molten metal into molds to make a finished piece. Blacksmiths use fire, water, and steel to hammer out fanciful and useful objects. All four of these metalworking techniques can create art objects of great beauty as well as useful objects that meet a practical need. The choice is yours!

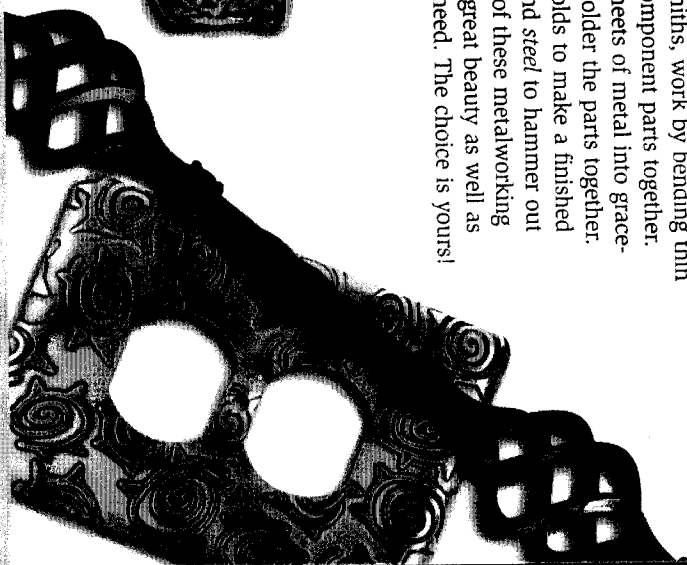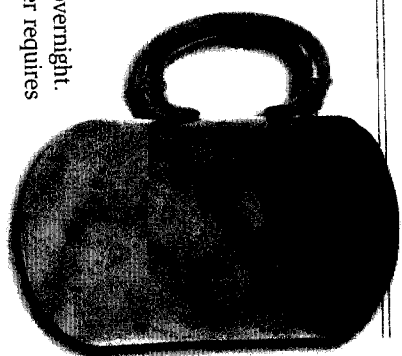

Anatolia is a region in modern-day

Turkey.


The History of Metal

Working metal is one of humankind's oldest skills. When pre-historic people discovered metal in its natural state and then found that they could change its shape by hitting it with a hammer, they became the world's first metalsmiths.

The Copper Age

During the late Stone Age, between 7000 B.C. and 6000 B.C., scientists believe humans in Anatolia learned to create useful items from *native* copper they had found. *Native metals* are those that occur naturally in a nearly pure form. Copper is a *nonferrous* metal—one that does not contain iron—that occasionally can be found in a native state. Other nonferrous metals that occur naturally are gold, silver, and tin.

About a thousand years later, scientists say, our ancestors began to melt native metals. Placing the lumps of metal in a *crucible*, a container that resists high heat, they would melt the metal and then pour a stream of molten metal into crude two-piece clay molds.



Native copper

ORE-BEARING ROCKS

Trade values increased the demand for metal objects and forced early metalsworkers to look for additional sources of metal. They found one solution in *ore-bearing rocks*.

It is unknown how our ancestors discovered that certain rocks leave a small amount of metal behind when they are melted in extremely hot fires. Today, this process—called *smelting*—is a large part of the metal industry. Smelting iron from ore probably began in China and India around 4000 B.C. and then spread westward to the area around the Black Sea.

Yet another important discovery of this era was the creation of *alloys*—metals mixed with other metals or substances to

change the properties of the metal. Silversmiths began to add a small amount of copper to silver, and goldsmiths began to add small amounts of silver and copper to gold, which reduced the *ductility* of these two very soft metals, making them less likely to deform—and much more useful.



Ore-laden rock

The Bronze Age

The Bronze Age began in China around 3300 B.C., when smiths began creating tools with a strong alloy made by adding tin to copper. The result was bronze—a metal with such reduced ductility that it could be fashioned into tools strong enough to cut blocks of limestone and granite. By 2500 B.C., the technique had spread throughout India and to the eastern Mediterranean countries.

CASTING EMERGES

Throughout the early ages of metalworking, smiths could create objects by heating metal and hammering it on an *anvil*. As their knowledge of metal increased, they found that molten metal could be cast into a hollow mold.


Initially, molds were made of clay. As metalsworkers in countries in eastern India, China, and along the Mediterranean Sea developed their casting skills, better types of molds emerged. Some types of molds, including hard-packed sand molds and ceramic molds, are still being used.

The Iron Age

Soon after people discovered that they could smelt ores, the production of iron began. Because iron ore is more abundant than copper ore, iron can be produced in larger quantities and at lower cost than copper. Smiths began to create iron pieces such as cooking kettles, which quickly became popular because of their availability and usefulness.

The Discovery of Steel

Metalsworkers in India and Japan independently discovered how to make steel in about A.D. 600. To create this strong alloy, iron and carbonaceous material (charcoal, sawdust, or other matter that contains the element carbon) were mixed in a crucible and heated in a *forced-draft* furnace long enough for the iron pieces to melt and absorb the carbon gas produced by the carbonaceous matter. The result was a steel disk, called a cake, which blacksmiths then forged into bars that could be used as trade goods.

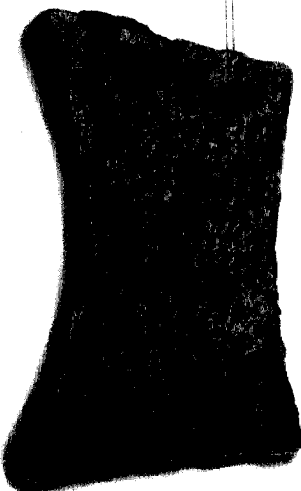

Copper ingot, Bronze Age, Greece

Because of its low production cost and high demand, iron became known as the "democratic" metal.

Because steel is less ductile and *malleable*—capable of being shaped with tools—than iron, a blacksmith has to work harder to make something out of steel than out of iron. Objects made of steel are much less likely to bend or deform than items made of iron, and by controlling the amount of carbon introduced during the production stage, steels of varying *hardness* can be manufactured.

CARBON STEELS

The drawbacks to making something from high-carbon steel are lost flexibility and the chance that the item may snap if twisted.

Steel is iron that contains less than 2 percent carbon. Low-carbon steel contains up to 0.25 percent carbon. Medium-carbon steel contains between 0.25 and 0.55 percent carbon. High-carbon steel contains more than 0.55 percent carbon, but today's usual upper limit is about 1.20 percent carbon. Carbon steels contain iron as the only metal in their composition.

The steel that is most often used by today's blacksmiths and sheet metal mechanics contains between 0.08 to 0.23 percent carbon. Modern industry uses one of the medium-carbon steels to make most hand tools. If an item must hold a sharp edge for a long time, such as a pocketknife or an ax, then one of the high-carbon steels is used.

ALLOY STEELS, STAINLESS STEELS, AND BEYOND

Until the invention of the steam engine, wrought iron and carbon steel served quite well. As the use of steam-powered machinery caught on with industry during the 19th century, each new steam engine model produced greater power.

These increasingly more powerful engines placed more demands upon their metal components, so the engineers who designed steam engines began to demand stronger and tougher new alloys, especially *ferrous* alloys. They turned to *metallurgists*—scientists who study the properties of metals—to help meet demands.



Modern steel companies produce an average of 200 to 300 different steel grades to meet the industry's demands.

The metallurgists experimented by adding small amounts of other metals to carbon steel, creating alloy steels that were increasingly more ductile, stronger, harder, tougher, and more resistant to wear and *corrosion*.

Rising demands by industrial steel consumers, such as the producers of automobiles and manufacturing equipment, have led to the development of many new varieties of steel.

The Basics of Metalworking

Metalworking requires the craftsman to pay close attention to the work at hand and to adhere closely to special safety requirements. Before diving into the techniques of metalworking, learn how to keep yourself and others safe while working with metal.


Safety Rules

When working with metal, acid, and high temperatures, metalworkers should be aware of possible hazards, and youths must have adult supervision. Following the rules will keep metalworking safe and enjoyable.


Sheet Metal Safety


Paying attention to what you are doing and wearing the proper gear is critical in metalworking. When sheet metal is cut, a small chip of metal can fly anywhere—possibly into your eye. Sharp edges on metal can cause cuts. Hot metal can cause painful burns. The rules listed below apply to all four metalworking options.

1. Always work with direct adult supervision.
2. Always wear safety goggles or safety glasses, leather gloves, and a shop apron.
3. Handle sheet metal with care. It can cause serious cuts.
4. Treat every cut immediately, no matter how minor, to help prevent infection.

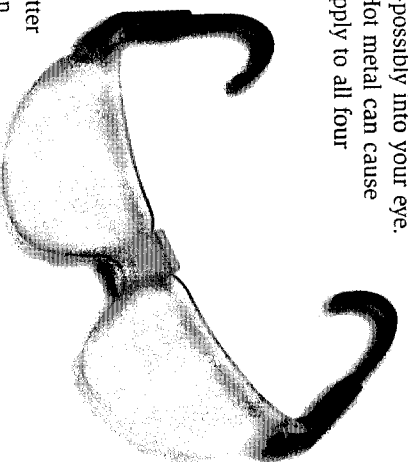

Safety glasses

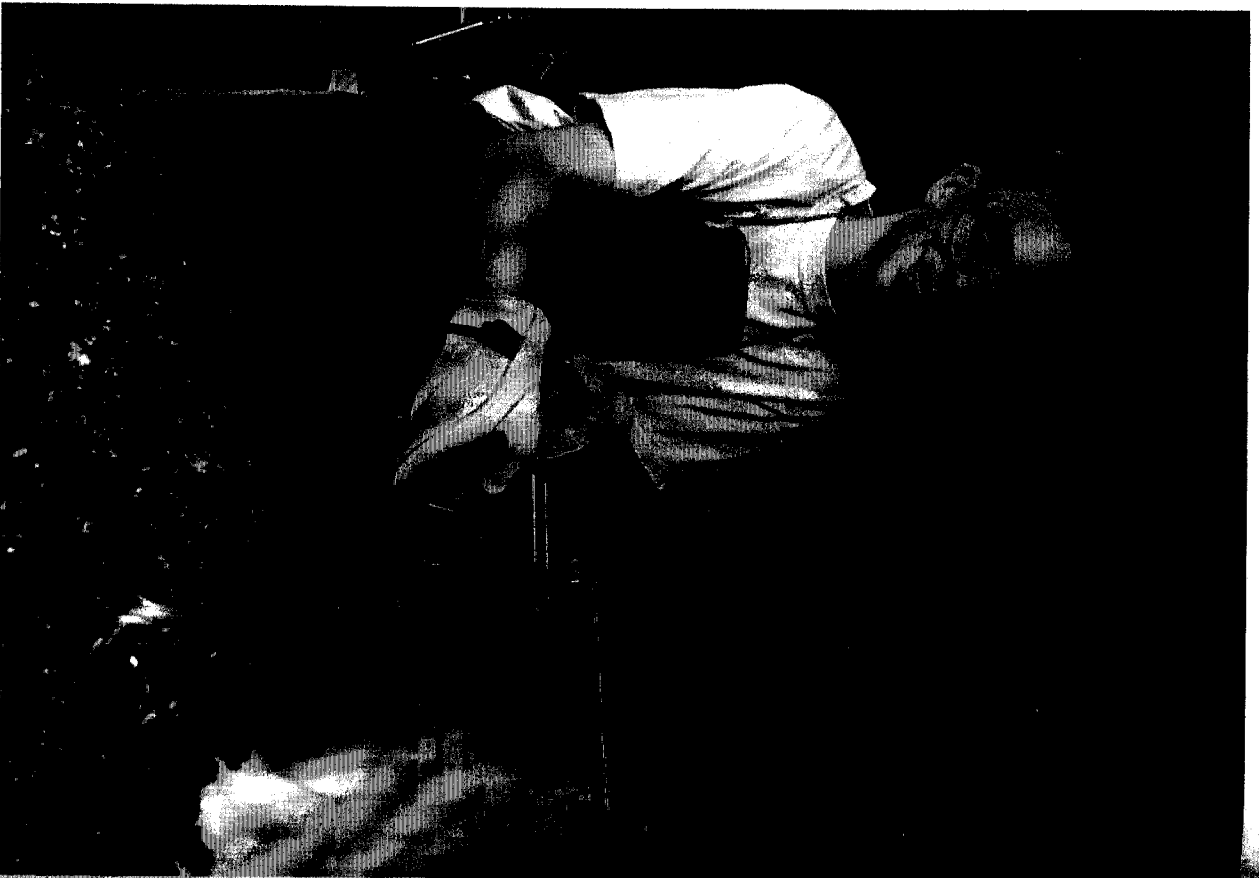

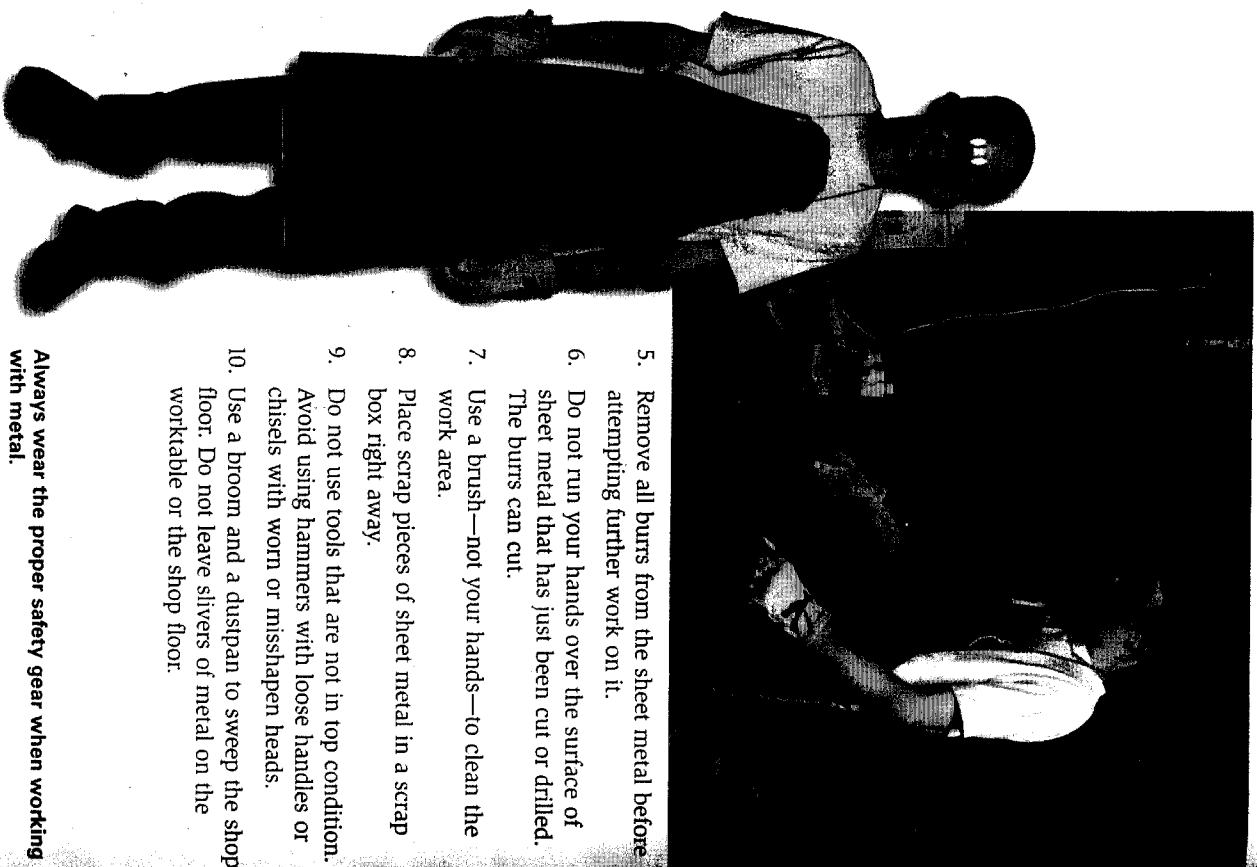


5. Remove all burrs from the sheet metal before attempting further work on it.
6. Do not run your hands over the surface of sheet metal that has just been cut or drilled. The burrs can cut.
7. Use a brush—not your hands—to clean the work area.
8. Place scrap pieces of sheet metal in a scrap box right away.
9. Do not use tools that are not in top condition. Avoid using hammers with loose handles or chisels with worn or misshapen heads.
10. Use a broom and a dustpan to sweep the shop floor. Do not leave slivers of metal on the workable or the shop floor.

Always wear the proper safety gear when working with metal.

Safety With the Pickling Tank

If you select the silversmith option to complete your Metalwork merit badge, you have additional safety rules to learn. Follow these guidelines when using the *pickling tank*, an integral step in the silversmithing process.

1. Always use the pickling tank with adult supervision.
2. Always wear eye protection, a shop apron, and rubber gloves when working with the pickling tank and solution. Use tongs to move items into and out of the pickling solution.
3. Use the pickling tank in a well-ventilated space, and do not breathe fumes from the pickling solution.
4. Never pour water into the pickling tank solution; pour the pickling solution into the water.
5. Keep small children and pets away from the pickling tank.
6. Always store the pickling tank with its lid tightly secured.
7. Plainly mark the contents of the pickling tank.

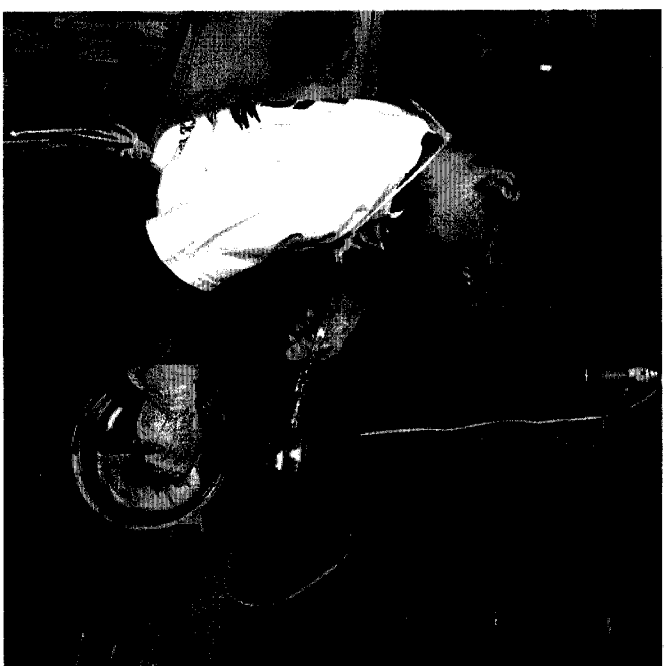

Safety With Molten Pewter

If you select the founder option to complete your Metalwork merit badge, you will be working with molten pewter. You must know a few more safety rules:

1. Always work with direct adult supervision.
2. Have a fire extinguisher handy when using the *melting pot*.
3. Place a sheet of metal under the melting pot and the mold-pouring area to prevent accidental splatters from burning your workable.
4. Wear safety glasses, leather gloves, long pants, boots, and a shop apron when pouring metal. Be sure to pull your pant legs down over the top of your boots. Do not wear shorts, sandals, or water shoes.
5. Do not set a pouring ladle down with its handle extending past the edge of the workbench.
6. Do not put moist or wet metal in the melting pot. Bubbles caused by escaping steam will cause the molten metal to splash out of the crucible, possibly causing painful burns.
7. Do not eat while casting metal.
8. Always wash your hands after handling metal.

Safety With Hot Steel

If you choose the blacksmith option to complete your Metalwork merit badge, you will be working with orange- or yellow-hot steel. Here are some special rules that you must follow:

1. Always work with direct adult supervision.
2. Have a fire extinguisher handy at all times.
3. Wear safety glasses, leather gloves, a shop apron, long pants, and boots when working in a blacksmith shop. Be sure to pull your pant legs down over the tops of your boots. Do not wear shorts, sandals, or water shoes.
4. Allow hot metal to cool in an out-of-the-way place.
5. Use tongs to pick up a dropped object. Although it might not glow, the metal might still be 1000 degrees.

Tools and Materials

The following tools and materials can be used to learn the techniques and complete the projects described in this pamphlet. The basic techniques are explained in this chapter, and step-by-step instructions for the projects are given in later chapters.

Tools

- ☐ Sheet metal snips
- ☐ Patterns
- ☐ Machinist's vise
- ☐ Center punch
- ☐ Flat-faced wooden mallet
- ☐ Pipe anvil
- ☐ Iron pipe of about 2-inch outside diameter
- ☐ Hand seamer
- ☐ Hammer
- ☐ Lineman's, needle-nosed, and locking-jaw pliers
- ☐ Wood blocks, in pairs
- ☐ Two C-clamps
- ☐ Flat file with handle
- ☐ 12-ounce ball peen hammer
- ☐ ½-inch cold chisel
- ☐ Hacksaw and spare blades
- ☐ Pop rivet gun
- ☐ Rivet set
- ☐ Propane torch
- ☐ 125-watt or 150-watt electric soldering iron
- ☐ Steel dividers
- ☐ Folding rule or measuring tape
- ☐ Carpenter's square (or equivalent)
- ☐ Metal straightedge
- ☐ Scriber
- ☐ Drill press
- ☐ Drill bits (sized to match the pop rivets)
- ☐ Shop apron
- ☐ Leather gloves
- ☐ Safety glasses



Materials

- ❑ Lead-free solder
- ❑ Variety of flat- and round-rope-size metal for cans (avoid institutional-size food cans; they are too large to make the projects in this pamphlet)
- ❑ Two or three tempering nails
- ❑ Two or three pop rivets
- ❑ Two 3-by-3-inch pieces of 26- or 28-gauge copper or brass (not steel or aluminum)
- ❑ One 5-inch piece of 1/2-inch (round or square) medium-hard or high-carbon steel (Cr15, V15, or equivalent)
- ❑ Clothier hanger wire
- ❑ Five or six small blocks of scrap 2-by-4-inch lumber of different lengths
- ❑ One 6-inch flat steel scrap
- ❑ Soapstone pencil



Mark your tools with tape, paint, or permanent markers so that you can identify them easily in the shop.

Springback

Cold metal does not always stay in place after it is bent. To overcome the *springback* effect, the metal often must be bent past its *yield point*.

An experiment will demonstrate springback. Place a thin piece of sheet brass or sheet copper that has never been worked between two pieces of wood, leaving enough metal clear of the top so you can press against it with your hand. Clamp the wood and metal tightly into a vise. Without using any tools, do your best to put a 45-degree bend in the unworked metal. Stop when you have pushed the metal to 45 degrees. *Do not overbend the metal.* When you let go, the angle of the metal will adjust itself to something less than 45 degrees. That effect is springback.




To demonstrate springback, use your hands to push the unworked metal into a 45-degree angle.

Work Hardening

The process of hardening a metal by hammering it is called *work hardening*. All metals except mercury and lead become harder as they are hammered.

As a metal is work-hardened, it becomes more resistant to change its shape. The metal must be softened—or *annealed*—from time to time during the work hardening process or it will rupture or crack.

Another experiment provides an example of work hardening. Hit a small piece of thin sheet brass or sheet copper repeatedly with the domed end of a ball peen hammer. Place your blows closely together, covering the work with small dents. This peening process causes the *crystals* that form the metal to condense with each blow. The closer the crystals are to each other, the stiffer the metal becomes.

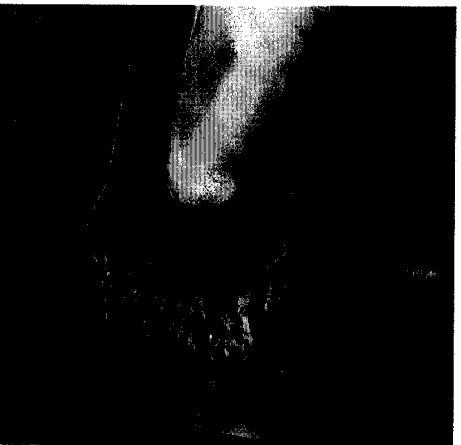

Annealing



Metal is *annealed* by heating it to the temperature where it is soft enough for the metalworker to continue to shape the piece. How long a piece of metal is exposed to the critical temperature depends on its thickness and shape.

Annealing Ferrous Metals

Most ferrous alloys must be cooled slowly after being elevated to their critical temperature. When high-carbon steel is cooled too quickly, it becomes brittle and tends to crack easily. This is referred to as being glass hard.

High-carbon steel is annealed by being heated to a bright cherry red heat (about 1350 degrees) and then being cooled slowly in a metal box insulated with wood ashes or vermiculite (clean cat litter). The piece must be cooled for at least eight hours before it is worked again.

Some nonferrous metals are
aluminum, tin,
copper, brass,
silver, gold,
and platinum.

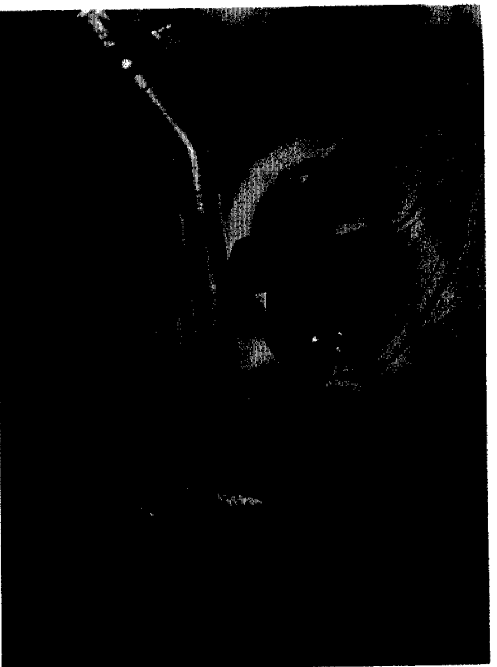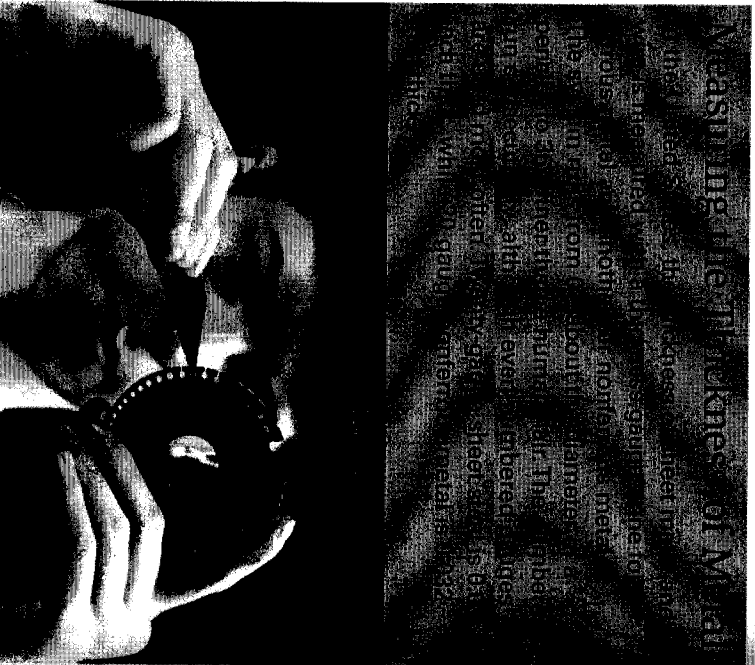


Annealing Nonferrous Metals

Nonferrous metals are annealed by bringing them to a cherry red heat, allowing them to cool until the color disappears, and then *quenching* them in a pickling solution. For copper, brass, and silver, cherry red heat ranges from 660 degrees to 1100 degrees, depending on the alloy. Unlike ferrous metals, nonferrous metals do not become brittle if cooled immediately after reaching critical temperature. This permits a metalworker to quickly continue working.

Riveting


A *rivet* is a mechanical fastener that is hammered into place. Factory-made rivets are available in a variety of sizes. Common nails can be used as rivets if they are cut to the correct length and the shank is peened down. While the nail head is flat instead of round like a rivet, it will hold adequately.

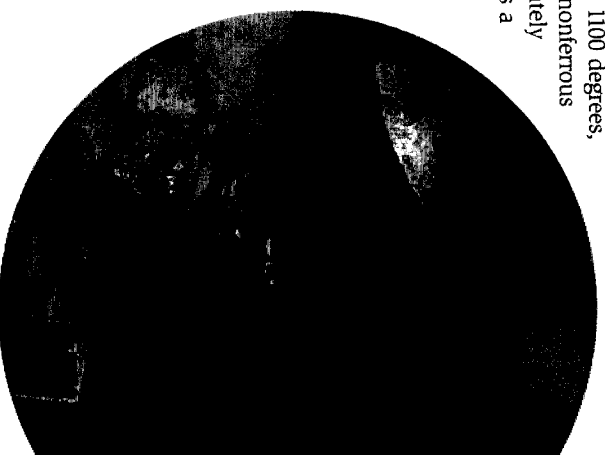

Soldering and Brazing

Soldering and brazing are methods of joining metals with melting nonferrous metal filler without having to heat the base metal to its *melting point*. The method used depends on the metals involved in projects.

Use only lead-free solder. Although lead-tin solder is still available, it releases toxic fumes. Over time, inhaling these fumes can cause brain damage. Eating or drinking from utensils made of lead-tin solder also can cause brain damage.



Before two metals can be joined by soldering or brazing:

1. The surfaces to be soldered or brazed must be clean.
2. An adequate source of heat must be available.
3. The correct solder or brazing alloy must be used.
4. The proper *flux* must be applied.

Solder

Solder is a metal filler that is melted to join two pieces of metal. By definition, soldering occurs at temperatures less than an arbitrary 800 degrees. Use lead-free solder when joining thin-plated steel and thin sheet steel.

Silver Solder

Silver solders are brazing materials that melt at temperatures higher than 800 degrees. When working with silver, always use silver solder rather than regular solder. Silver solder can be made to flow using a propane torch.

There are five categories of silver solder.	
Type of Solder	Flow Temperature
Extra-easy-flow silver	1200 degrees
Easy-flow silver	1300 degrees
Medium-flow silver	1360 degrees
Hard-flow silver	1460 degrees
High-temperature silver	1490 degrees


Having all five types of silver solder handy is smart when assembling pieces of a complex project. The first solder joint should use the highest-temperature silver solder available. Subsequent joints should use the remaining solders in declining temperature order as the subsequent components are attached. This way the first joint will not come apart as the next joints are soldered.

Flux

All metals oxidize when exposed to air, especially humid air. The thin layer of tarnish or rust that results must be removed before solder will stick to a metal. A chemical mixture called *flux* is applied to the joint to remove these oxides and prevent further oxidizing while the metal is heated to the soldering temperature. Flux also lowers the surface tension of the molten solder, making it flow more easily.

Cutting


Use handheld sheet metal shears to make projects. These shears are manufactured with right-cutting, left-cutting, and combination jaws. Hold the shear and look down the blade to determine which kind of shear you have. If the blade curves to the right, it is a right-cutting shear. If the blade curves to the left, it is a left-cutting shear. If the blade does not curve at all, it is a combination shear that can be used to make straight as well as circular cuts.

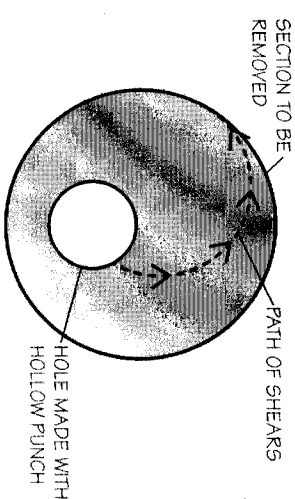

To cut a hole in sheet metal, first use a hollow punch to make a small hole inside the diameter of what will become the large hole. Then insert the tip of the snips into the punched hole. Cut in a circular pattern until the layout line is reached. Follow the layout line to complete the cut.



When using an acid flux, wear gloves and goggles, and work in an area with good ventilation.

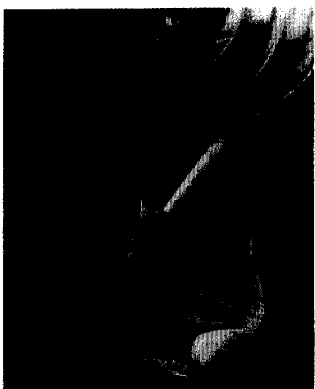

Edging

The small band of metal that runs around the top edge of a modern metal can is a machine-made *hem*, or a safe edge. Because a cut edge is too sharp to be left in a finished piece, a careful sheet metal mechanic will put a hem in the edge for safety.




Use a hand seamer to make bends. To bend a safe edge, place $\frac{3}{16}$ inch of metal in the seamer's jaws.

Bending

A bar former is used to make bends in small sheet metal sections, and a bending break is used to make bends in large sheet metal sections. Both tools can be set up to make 90-degree and 45-degree angles as well as curved bends. If there is no access to a bar former or a bending break, clamp sheet metal between two wooden blocks or between two steel bars and use a wooden *mallet* to make the bend. Or, if your projects are small, use a hand seamer to make bends.

Seaming



Seaming is the process of joining two pieces of metal as if by sewing. The flatlock seam is most commonly used when making an item from sheet metal. When designing a piece, allow for extra metal on the edges to make the seams.

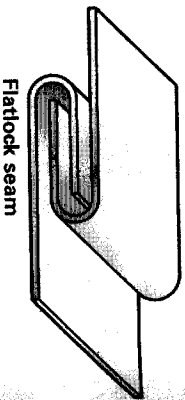


Flatlock seam

Rolling

Rolling is a technique that allows the metalworker to create rounded shapes easily. A slip-form roller can be used to shape sheet metal into a cylinder. Using a mallet, you can also gently hammer the metal over the edges of an anvil or over a piece of iron pipe.

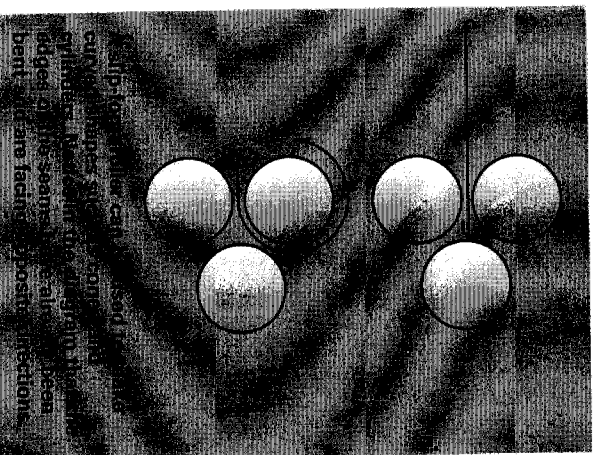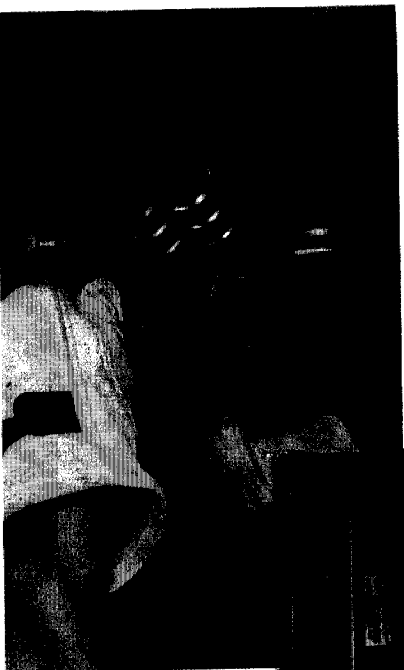

When using the horn of the anvil to roll sheet metal, do not hit straight down on the metal where it touches the anvil. Position the blows to avoid denting and crimping the sheet metal.

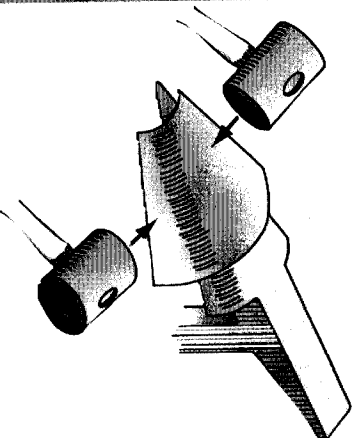


Tempering

Unlike iron, steel can be hardened to the point that it becomes brittle and fractures easily. To make it useful, its brittleness must be relaxed enough to make the steel capable of holding an edge without snapping when flexed. This relaxing technique is called *tempering*.


Tempering is done in two steps. First, the steel is made brittle by being heated to its critical temperature (between 1350 and 2400 degrees, depending on the alloy and the carbon content) and then being cooled rapidly by plunging into a pickling bath or water, depending on the metal.

The second step is the real tempering step. The brittleness is relaxed by applying just the right amount of heat to achieve the correct degree of hardness needed to make the tool function properly. A temper color index will help determine the degree of hardness desired.

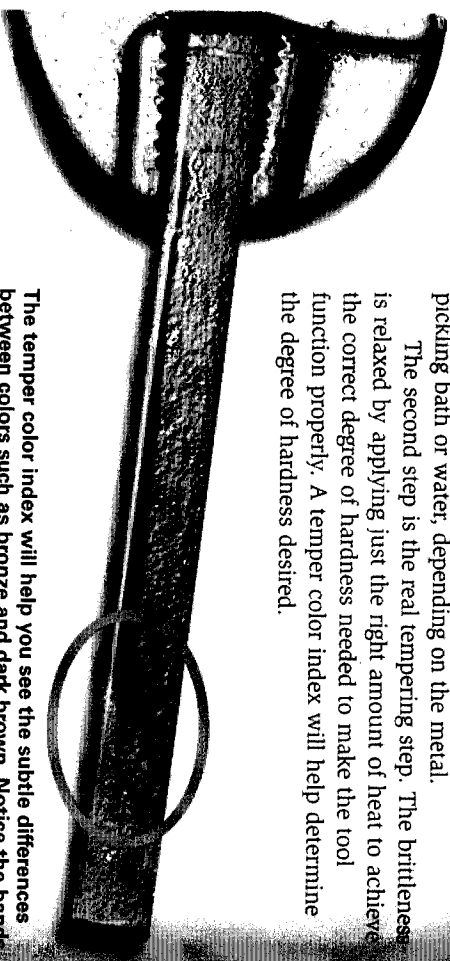

The temper color index will help you see the subtle differences between colors such as bronze and dark brown. Notice the bands of color that have appeared in this area.

The colors on the steel will be matched with a corresponding temperature during the tempering step.

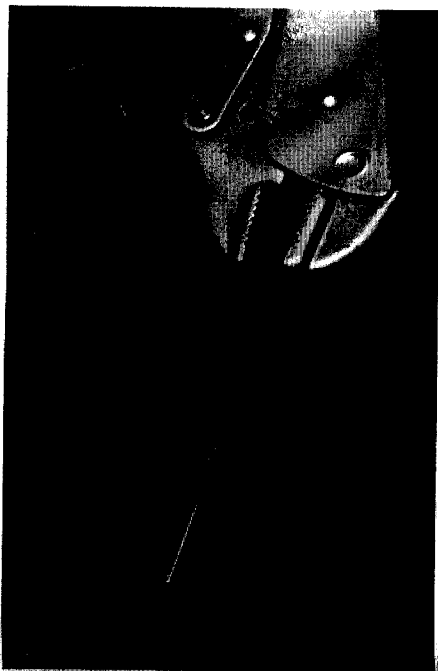

Temper Color Index Chart

Many different degrees of tools can be made from the same bar of metal. The variable is the heat at which the metal is tempered. Each tool needs a different final degree of hardness, and this is accomplished by heating it to one of these temperatures, thus relaxing the brittleness just enough to make the tool hard enough to do the job, but not so hard that it will shatter when used.

Temper Color	Degrees Fahrenheit	Tool Being Made
Greenish blue	630	Light springs
	620	
Light blue	610	Screwdrivers
	600	Wood saws and punches
Dark blue	590	Spring
	580	Pick
Blue	570	Light work cold chisels
	560	Knives
Dark purple	550	Steel cold chisels
Purple	540	Axes and punch punches
Light purple	530	Hammers and sledges
Brown with purple spots	520	Surgical instruments
Dark brown	510	Twist drills
Bronze	500	Red drills and hot chisels
Dark straw	490	Wood chisels
Golden straw	480	Drifts and leather dies
Straw	470	Parting tools
Straw yellow	460	Thread-cutting tools
Yellow	450	Planer tools
Light yellow	440	Drills, file stone
	430	Paper cutters and lathe tools
Pale yellow	420	Razors
	410	Burnishers
	400	Scrapers

Making a Temper Color Index

Making a temper color index will help you decide when a metal has reached the desired temperature.

Step 1—Saw a piece of flat steel about 5 to 6 inches long.

Step 2—Sand or file one side of the bar until it is bright and shiny.

Step 3—Firmly clamp one end of the steel in a pair of locking-jaw pliers, leaving 4 inches free.

Step 4—Have an adult light the propane torch.


Step 5—Place the steel over the flame, letting the light blue cone of heat touch the steel about 2 inches from the tip of the pliers.

Step 6—Continue to hold the steel over the flame in the same place. Do not wave the steel bar over the flame. Wait for the iridescent colors to appear.

Step 7—As the colors appear, continue to heat that spot and watch the colors move down the bar. The first color that will appear is a faint straw color. Soon other colors will appear, such as deeper shades of straw, bronze, purple, royal blue, and sky blue.

Step 8—When the straw color reaches about $\frac{1}{16}$ inch from the far end of the steel, quickly plunge the steel into a bucket of water to cool it. This is called quenching. Practice good technique by dunking the steel up and down rather than stirring it.

Step 9—When air bubbles and steam stop rising from the metal, wait about 30 seconds, then remove the piece from the water, dry it off, and rub a small amount of lubricating oil on it to protect it from rust.

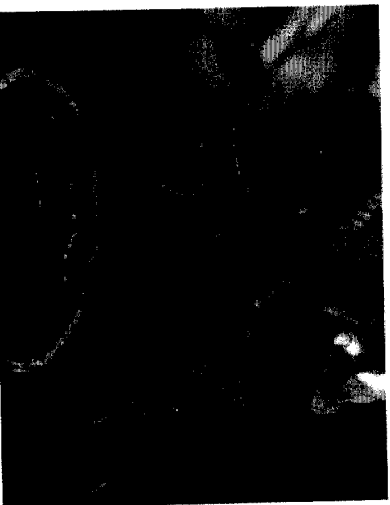

Making a Center Punch

Your first exercise in tempering will be to make a center punch, which is a basic metalworking tool used to put small dents in metal. Unless your counselor suggests another type, use a medium-carbon C1065 steel. The basic technique is the same, regardless of which steel or quenching medium is chosen.

Step 1—Measure about 6 inches of C1065 bar steel (either round or square), and mark it with a soapstone pencil.

Step 2—Position the cutting line near the edge of the vise. Clamp the jaws tightly to prevent the metal bar from vibrating as it is sawed.

Step 3—Using a hacksaw, cut the piece from the bar.



Center punch

Do not scrub the file back and forth; this dulls the teeth.

Step 4—Set the bar stock aside and clamp the cut-off section in the vise with one end extending about 2 inches.

Step 5—Using a flat file, file a short tapered point in one end by bearing down on the forward stroke to scrape the metal. Lift the file away from the metal on the backward stroke.



Tempering the Center Punch

Now you are ready to temper the center punch. For safety, be sure to work under direct adult supervision.

Step 1—Using tongs, hold the center punch under a large torch flame or place it in a blacksmith's fire. Bring the metal up to a bright cherry red heat (about 1350 degrees).

Step 2—Using tongs, remove the center punch from the heat and plunge it immediately into a nearby bucket of water. Do not throw it into the water. Hold it with the tongs and dunk it up and down in the water. Do not use a swirling motion. Doing so will part the water and prevent it from completely reaching all surfaces of the steel, causing uneven cooling and warping. By moving the hot steel up and down in the water, the gas jacket that forms around it as the water turns to steam is broken up.



Step 3—Once the steel is cool, test it for hardness. Do not drop it or tap on it with a hammer, or it will shatter. Run an old file over the steel. (This test will dull a new file's teeth.) The steel will be so hard that it is unscratchable, or glass hard.

Step 4—Next, look at the temper color index chart and decide which temper color to use. Cross-match the colors on the chart with the color on the temper color index. You will look for that color when you heat the center punch.

Step 5—Using sandpaper, rub the last 3 to 4 inches of the center punch to a bright shine.

Step 6—Clamp the striking end of the center punch in a pair of locking-jaw pliers, leaving the pointed end free.

Step 7—Have an adult light a propane torch and hold it or set it in a secure cradle.

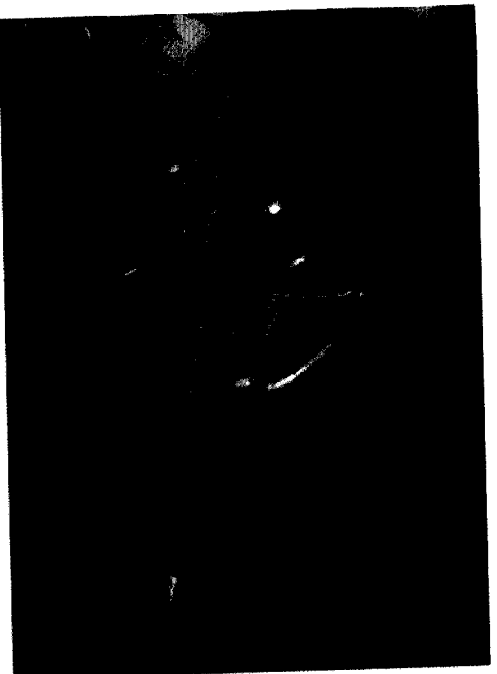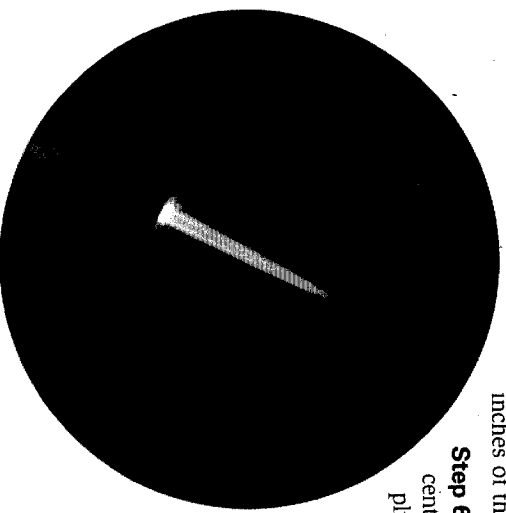

Step 8—Place the shaft of the center punch over the flame, letting the light blue cone of heat touch the steel about 2 inches from the tip of the pliers. Do not wave it over the flame.

Step 9—Wait for the iridescent colors to appear. The first color that will appear is a faint straw color. As the colors move down the bar, shades of straw, bronze, purple, royal blue, and sky blue will appear.

Step 10—When the temper color that you have chosen is about $\frac{1}{16}$ inch from the point of the center punch, quickly plunge the center punch into a bucket of water. Remember to dunk the center punch up and down to break up the steam jacket.

Step 11—When the steel has cooled in the bucket of water for a couple of minutes, remove it from the water, dry it off, and then rub a small amount of lubricating oil on it to protect it from rust.

If the steel is quenched at the wrong time, the entire tempering process must be repeated. Being able to judge the precise time to quench the steel takes practice.

The Sheet Metal Mechanic/Tinsmith

The difference between a sheet metal mechanic and a tinsmith is the metal that they use. For the most part, all metalworkers use the same techniques.



Today, people who work with sheet metal are called sheet metal mechanics because they are trained to work with any type of sheet metal. Working with thin sheets of stainless steel, aluminum, mild steel, galvanized steel, copper, and brass, a sheet metal mechanic can make a remarkable range of items.

Using many of the traditional tinsmith's skills along with more modern techniques such as spot welding, sheet metal mechanics make a wide range of components used in things like automobiles, aircraft, satellites, heating and air-conditioning systems, building construction, and consumer products.

Because maintaining high rates of productivity is so important to manufacturing, sheet metal mechanics use machine tools to assist them when they roll, cut, and bend each item's basic components.

Not all sheet metal mechanics work in manufacturing plants. Many work in local shops that fabricate components for heating and air-conditioning systems. Some make custom-designed components for local building construction firms.

Many of today's tinsmiths are trying to preserve the craft. Working with tools of ancient design, they use sheets of tin-plated steel to fashion museum reproductions for collectors and historic re-enactors. Sheets of pure tin were used to make household objects until the 18th century, but today the sheets are expensive and rare.

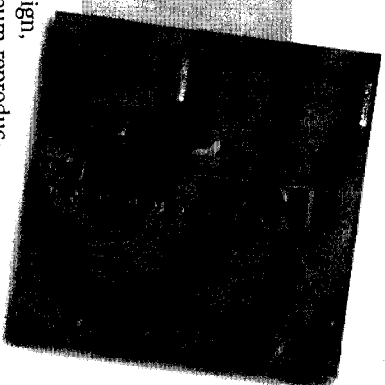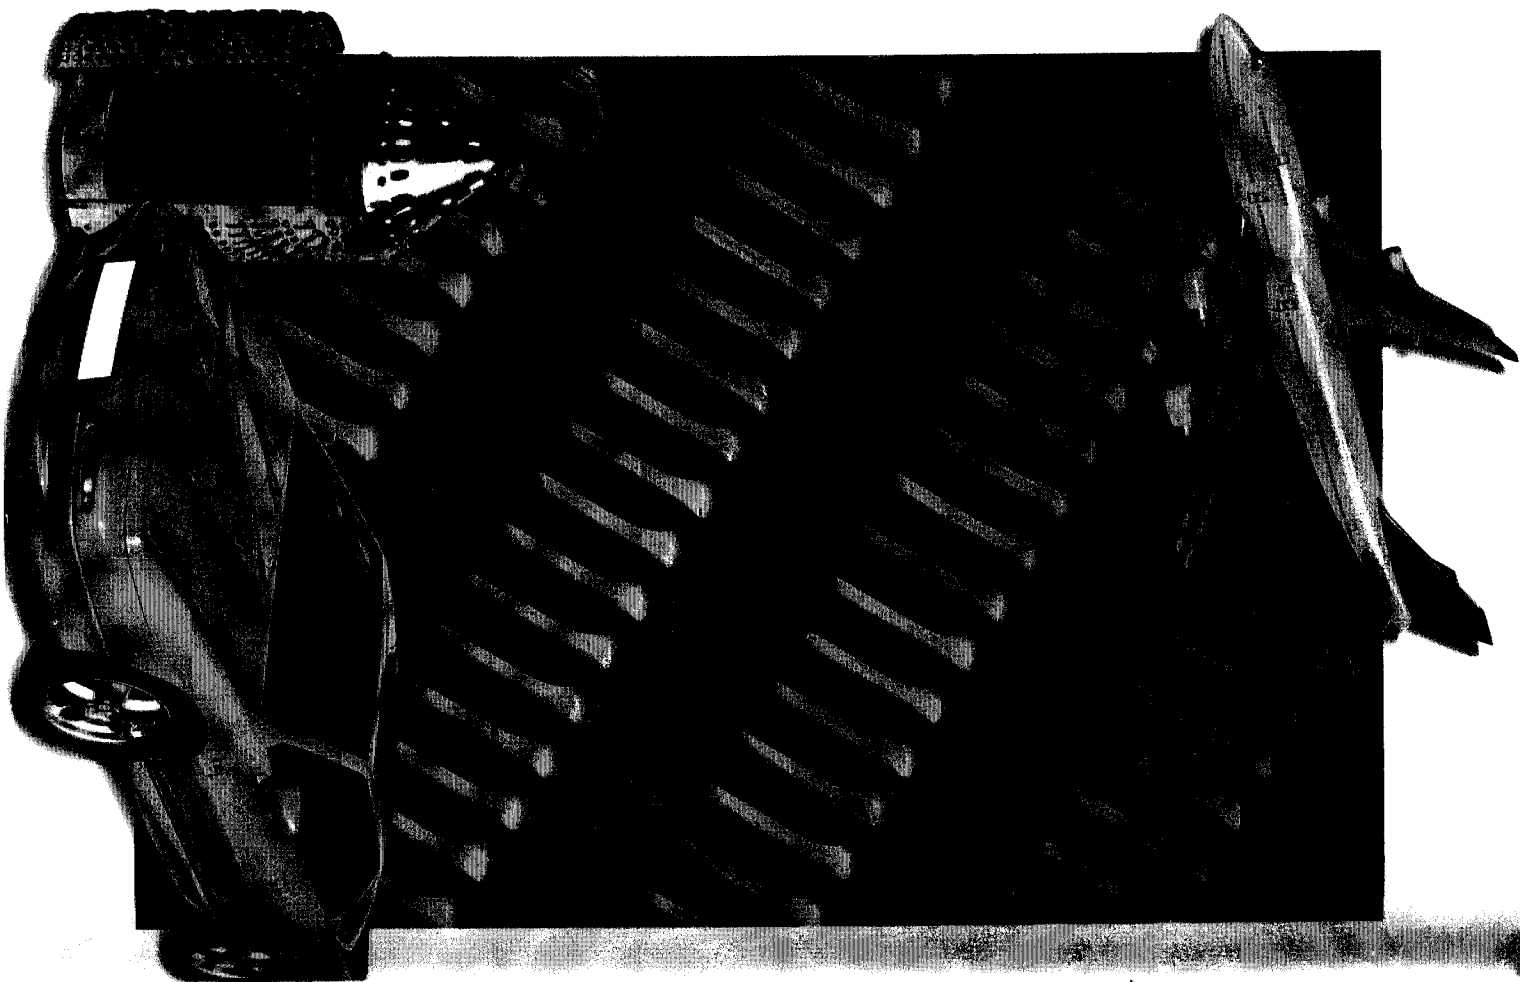

Basic Sheet Metalworking Tools

The tools needed by the sheet metal mechanic/tinsmith are not much different from the basic metalworking tools you learned about in the previous chapter. However, a few of these tools have special duties in the sheet metal mechanic's shop.

Anvils

Some of the most basic metalworking tools, *anvils* are the large blocks of iron on which pieces of metal are shaped. There are several types of anvils, and stake anvils are some of the most common.



Stake anvils are designed to be moved easily. They are usually mounted in a metal stake holder that has been attached to a stump or a large block of wood. A stake anvil does not need to be as heavy as a blacksmith's anvil because sheet metal is bent rather than forged.

The tinner's anvil has a flat surface with one curved edge. It is used to make straight and curved bends in thin sheets of tin-plated steel. It can be held in the square (*hardie*) hole of a blacksmith's anvil. The curved sides of the canister stake are useful when turning up the flatlock seam that is used when a capped bottom is attached to a canister or a drinking cup. The widely flared horn of a funnel stake is used to roll tapered cylinders such as a funnel.

The hatchet stake is used for making bends that go past 90 degrees. This is the stake used to put the bends in a flatlock seam. A hatchet stake can be made from a piece of $\frac{3}{4}$ -inch-thick hardwood, such as maple or ash, that is cut to a 45-degree edge on one side. It can be clamped in a vise and used horizontally or it can be placed on its side on the edge of a worktable with the long side down. Either way it is held, the sheet metal is tapped back against the angled face to form the flatlock seam.

Hammers

The face of a tinner's hammer is used to set rivets. The tapered end—the *peen*—is used to coax sheet metal around bits of stiff wire when making a wire edge. The bordering hammer also can be used in more advanced techniques to coax the sheet metal around a wire when making a wired edge and to bend the flatlock seam around the bottom of a canister when making a capped bottom.

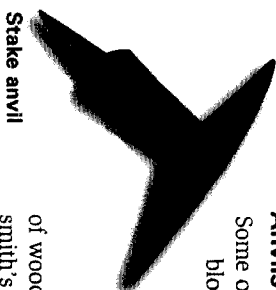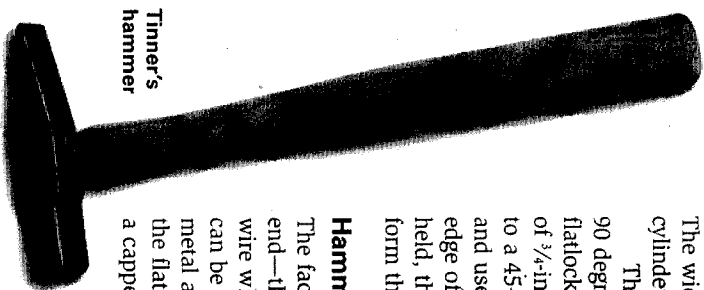

Hand Shears


Simple hand shears will work for all of the projects described in this pamphlet. Professional sheet metal mechanics and tinsmiths often use large, foot-operated shears or power-operated shears to cut their pieces from large sheets, but using hand shears is best for learning basic metalworking techniques. Only adults should use these power tools.

Make sure to keep hand shears sharp and well-maintained. Never try to cut thick sheets of metal with hand shears—this will dull the cutting edges and can cause the pivot bolt in the jaw to break. When you are done using the shears, wipe them with a clean cloth to remove the hand oils that cause rust. Be sure to place a light coat of oil on the shears and then wrap them in an oil-soaked cloth to prevent them from rusting. This is a good practice with all steel tools.

Preserving Your Work

Most finished metal pieces will need to be treated against rust and other forms of *oxidation*, which will ruin the piece over time. Objects made from zinc-plated (galvanized) metal need no further treatment to prevent rust because the zinc coating is the preservative. Aluminum does oxidize, turning white and chalky. Zinc chromate primer must be applied before painting aluminum or the paint will flake off.

Those who prefer a shiny metal surface must apply a degreaser to the metal and then apply a good quality clear-coat sealer. Clear polymer-based varnishes are often used. Tin-plated steel need not be painted because the tin coating acts as the preservative. Because the tin coating is so thin, it must be washed and dried after handling to remove natural salts and acids left by human hands.

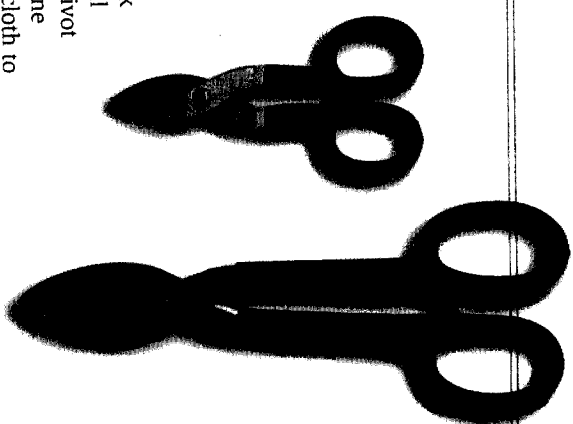

Hand shears

Copper, brass, and bronze also oxidize, turning green. Some people like this green effect and encourage the oxidation process by applying salt water to the piece.




Sheet Metal Projects

The sheet metal projects described in this pamphlet create simple objects that can be useful in camp. If you have an idea for a project that is not described here, you may design your own. Be sure your design uses some of the basic metalworking techniques described earlier.

Regardless of whether you have decided to make practical objects or art objects, be sure to show your design sketches to your counselor and to obtain your counselor's permission before you begin working on your projects.

Making a 16-Ounce Metal Cup

Metal cup patterns

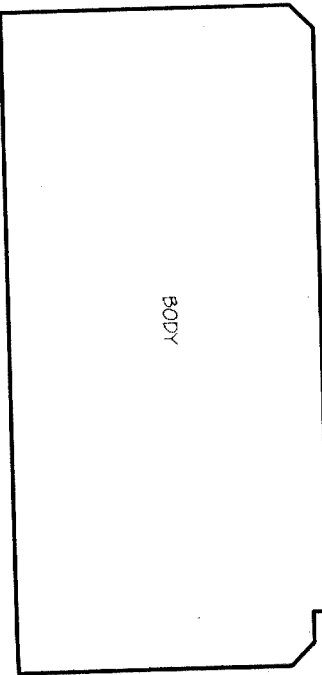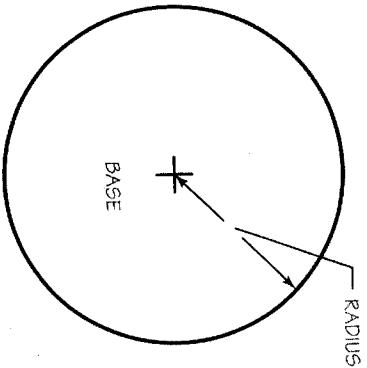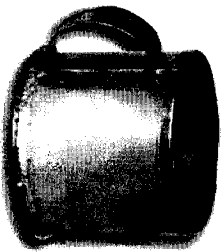


Basic Tools Needed


- ☐ Black iron stake
- ☐ Hatchet, stone (can also be made of hardwood with one edge cut to a 45-degree bevel)
- ☐ Funnel or chiseler stake (optional)
- ☐ Stake holder
- ☐ Short length of 3-inch-diameter iron pipe
- ☐ Mallets
- ☐ Sturdy machinist's vise
- ☐ Sheet metal shears
- ☐ 1-inch hole punch
- ☐ Stump (for mounting the stake holder)
- ☐ 125-watt or 150-watt soldering iron
- ☐ C-clamps
- ☐ 2-by-4-inch wood pieces in various lengths
- ☐ Center punch
- ☐ Steel ruler
- ☐ Hammer
- ☐ Hand seamer
- ☐ Scriber
- ☐ Steel dividers
- ☐ Try square
- ☐ Needle-nose, lineman's, and locking-grip pliers
- ☐ Various patterns
- ☐ Flux brushes
- ☐ Shop apron
- ☐ Leather gloves
- ☐ Safety glasses

Materials

- ☐ 26-gauge or 28-gauge sheet metal
- ☐ Lead-free solder
- ☐ Soldering flux
- ☐ Wire coat hanger
- ☐ Finishing nail (to prick pierced patterns in sheet metal)
- ☐ 1/4-inch copper tubing
- ☐ Three 4-by-6-inch pieces of window glass (1/4 inch thick) per lantern

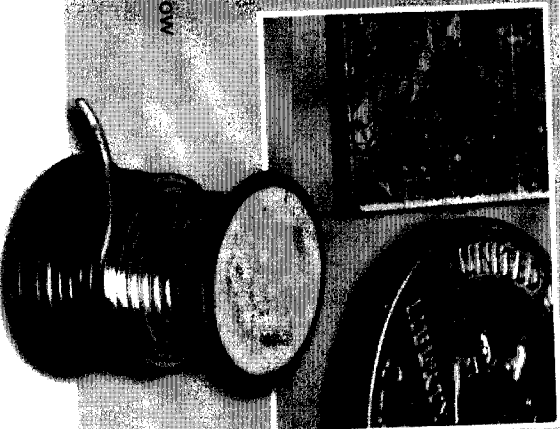

Step 1—Using the drawings as an example, sketch patterns on stiff paper for each of the three cup pieces: the body, the handle, and the base. When you have your sketches how you want them, cut out the shapes. These are your template pieces.

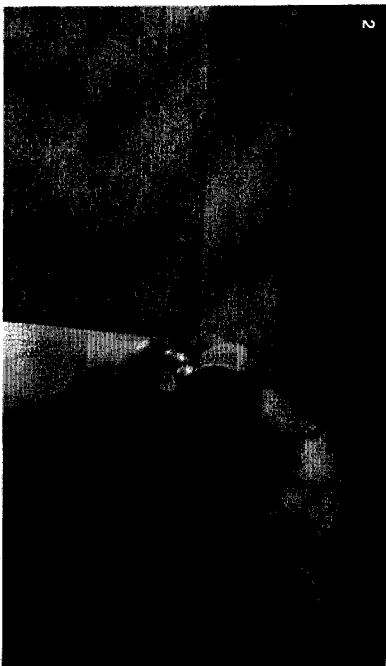

Step 2—Arrange the template pieces on the sheet metal and use a sharp nail or metal scriber to trace the outlines onto the tinplate.

Step 3—Using sheet metal shears, follow the scribed lines to cut out the three pieces. Use construction scissors to snip the $\frac{1}{16}$ -inch nicks in the pieces to be used as the cup's body and handle.





Step 4—Once the pieces are created, you can start putting together the body of the cup. Start by creating a safe edge along the top of the cup by bending over about $\frac{1}{4}$ inch of the tin.





Step 5—Bend the flatlock seam edges on both ends of the body, but don't attach the seam yet.


Step 6—Roll the cup body into a cylinder, then attach the flatlock seams.

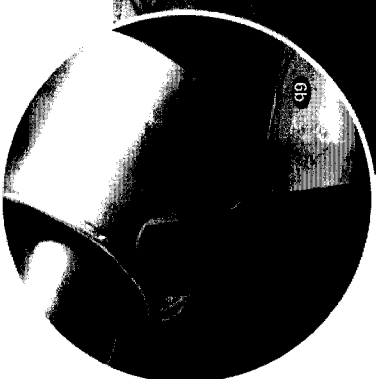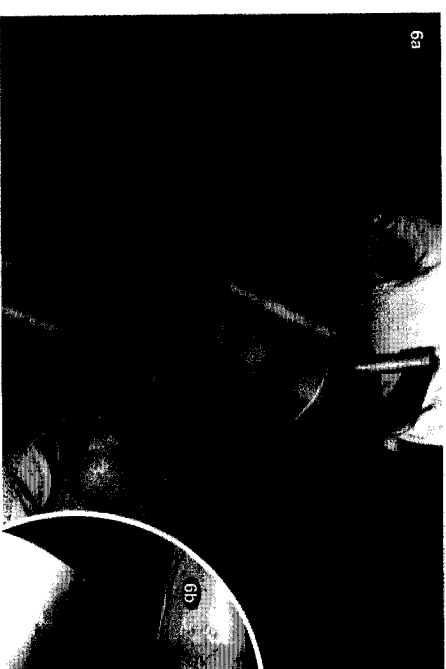

Step 7—Solder the flatlock seam, then solder the bottom piece to the body.

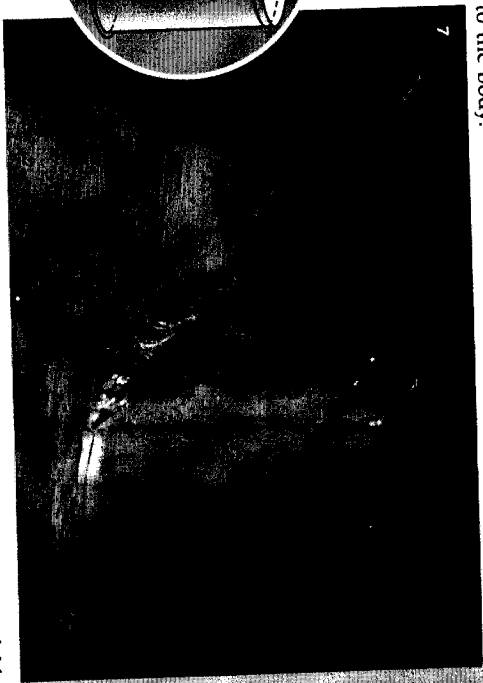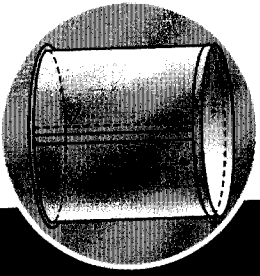





Step 8—Now you are ready to create the handle. Begin by folding safe edges along both sides just as you did the lip of the cup in Step 4, then roll the handle piece into a curve. Lastly, bend over about $\frac{1}{4}$ inch of each end to make "ears" to attach the handle to the body.

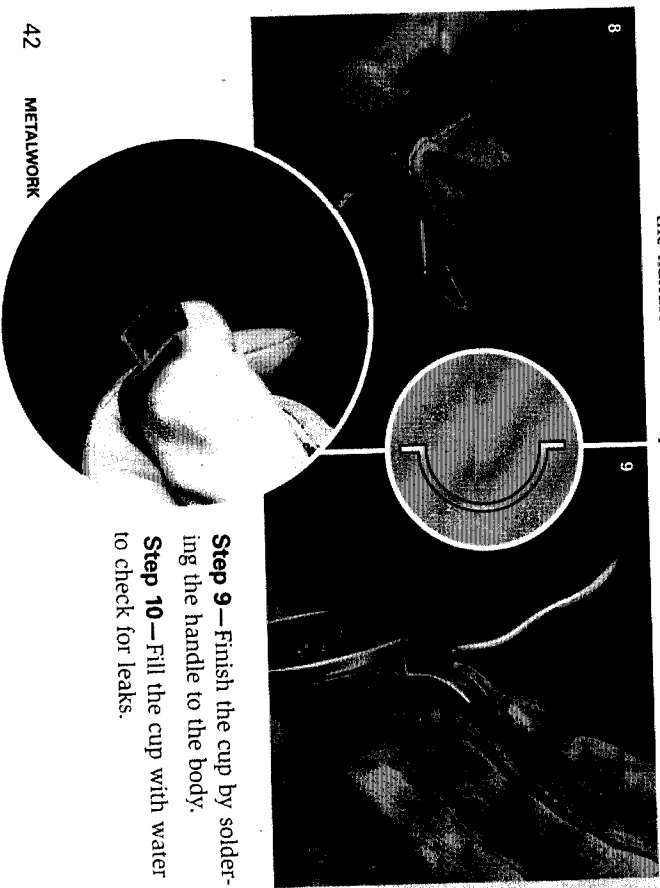

Step 9—Finish the cup by soldering the handle to the body.

Step 10—Fill the cup with water to check for leaks.

Making a Lantern

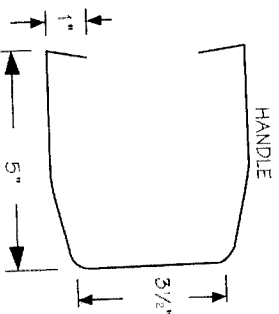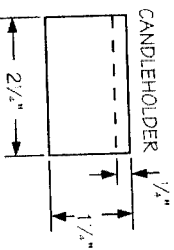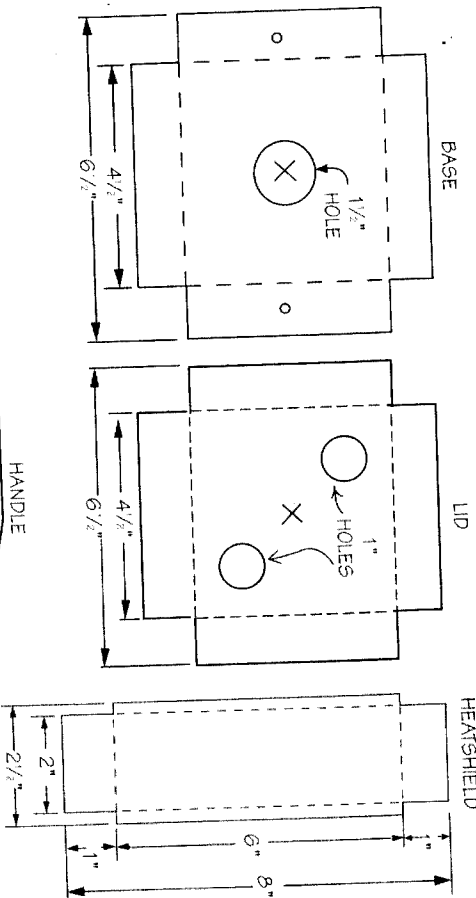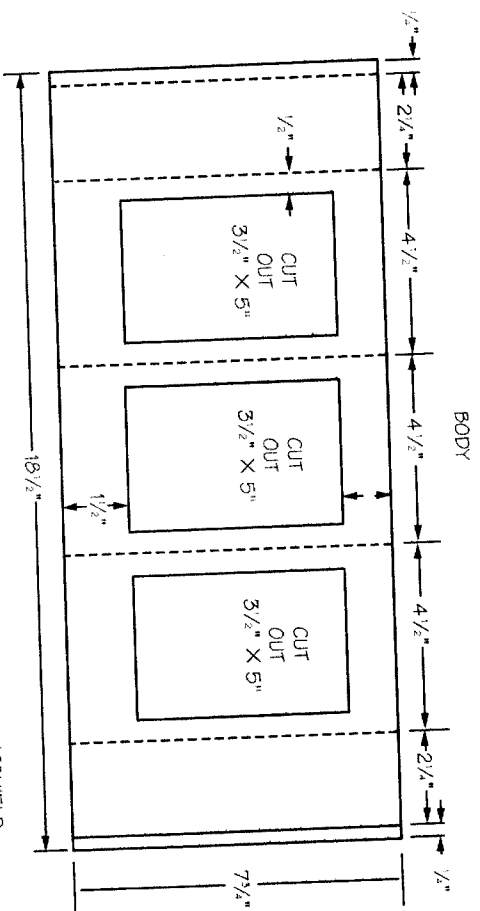



GLASS SIZE
1/2" X 4" X 6"
(3 REQUIRED)

Step 1—Arrange the patterns on a piece of sheet metal and scribe the outlines onto the sheet metal with a sharp nail or a metal scriber. Cut out each component using sheet metal shears and file all edges smooth.


Step 2—Punch a large hole in the center of the parts marked "cut out" in the pattern diagram; these parts will become the windows. Stick the tip of the snips into the hole and carefully cut a curved line until you reach one of the scribed lines that outline the shape of the window. Now you can cut straight along the scribed line.

Step 3—Fold the lantern body's $\frac{1}{4}$ -inch bends first, making sure to fold them in opposite directions. Next make the four body folds.




Step 4—Fold a hem on the candleholder and flatten it slightly with a mallet. Roll the candleholder into a cylinder around a $\frac{3}{4}$ -inch dowel. Don't try to close the gap in the cylinder—it comes in handy when removing melted candle stubs. You can use the blade of a screwdriver to pry out the melted wax.

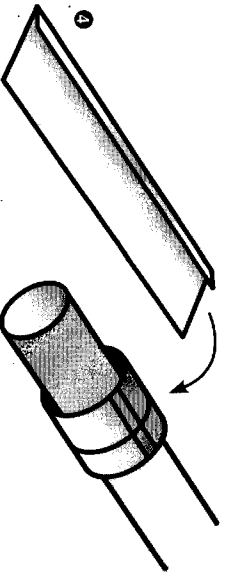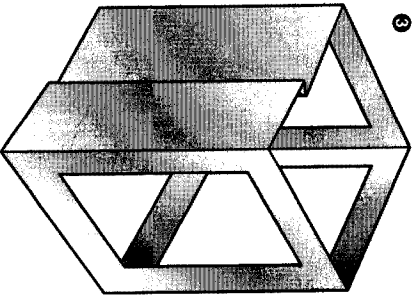

Step 5—Create the bottom piece by punching two large air holes in the base as shown and then folding down all four sides. Don't worry about leaving a small gap between each fold because this piece fits inside the body of the lantern. Solder the candleholder in place.

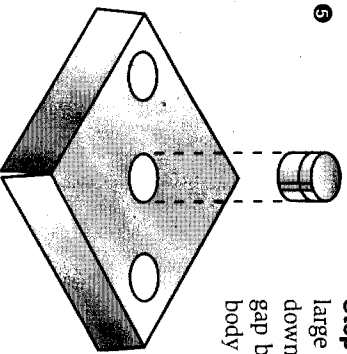

Step 6—Fold both $\frac{1}{4}$ -inch hems on the heat shield component. Fold the tabs as shown. Roll the heat shield into a flat-topped arc.

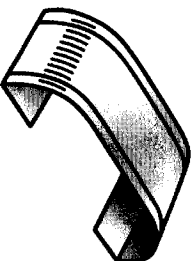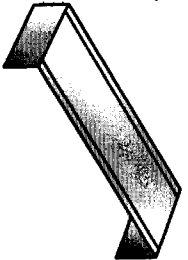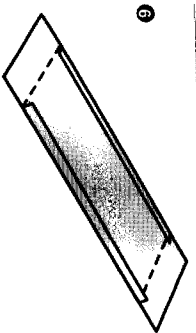

Step 7—Create the top piece by punching a large air hole in the center of the piece. Punch two small holes in an opposite pair of tabs for the wire handle. Fold down the sides—don't worry about leaving a small gap because this piece fits over the lantern body. Solder the heat shield into place.

Step 8—Set the body of the lantern over the bottom piece and solder the bottom in place.

Step 9—Make the glass holders by cutting pieces of $\frac{1}{4}$ -inch copper tubing to fit inside the lantern. Cut two lengths of tubing for each corner. Use florist's wire to wire them together in pairs, then solder them together. Remove the wires.

Step 10—Use a wire coat hanger to make the handle. Cut off the hook and straighten the length of wire, then bend it into the shape of a handle.



Step 11—Set the top on the body (it fits on the outside). Poke the scriber through the holes in the top and mark the corresponding spot on the body.

Step 12—Remove the top piece and use a nail to punch holes where you just marked.

Step 13—Have an adult cut three 4-by-6-inch pieces of $\frac{1}{4}$ -inch window glass. Put them in the lantern body and hold them in place using the copper glass holders.

Step 14—Place a candle in the lantern and attach the top using the wire handle.



To replace the candle, unhook the wire handle and remove the top piece.

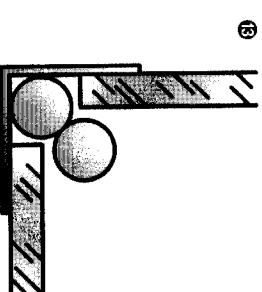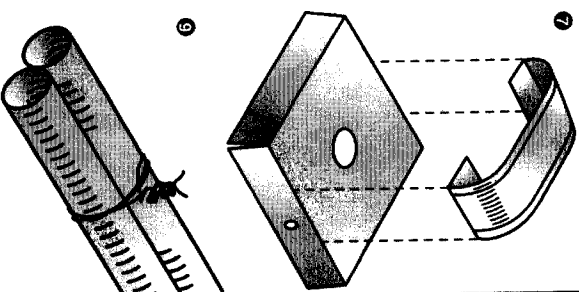

The Silversmith

Silversmiths do much more than hammer silver into beautiful shapes. They are artists who design one-of-a-kind pieces that start as a sheet of silver, often incorporating elegant hand engraving and beautiful patterns. They are also highly skilled in a number of metal-working techniques.

Well-trained silversmiths know how to function as sheet metal mechanics. They cut, bend, edge, roll, file, saw, rivet, solder, and braze, using sheets of silver, copper, nickel silver, and pewter. Silversmiths are pattern makers and foundries. They carve their own intricate patterns, create the molds, melt the silver, and then pour it into the molds. Silversmiths know the craft of the blacksmith. They know how to forge and temper high-carbon steel to make their own engraving tools, chasing tools, hammers, and stake anvils.

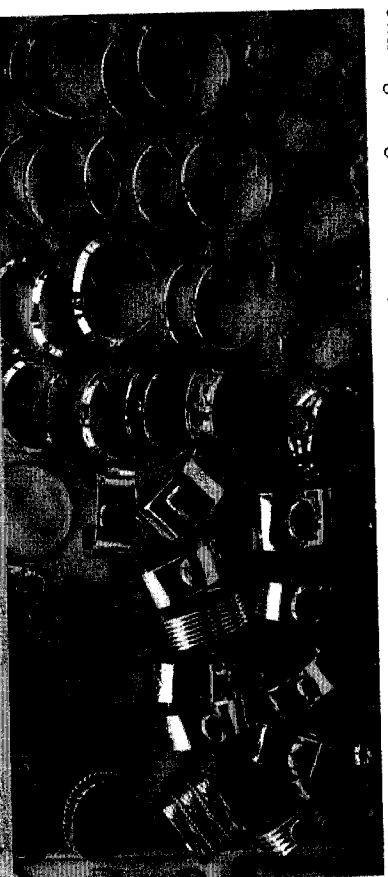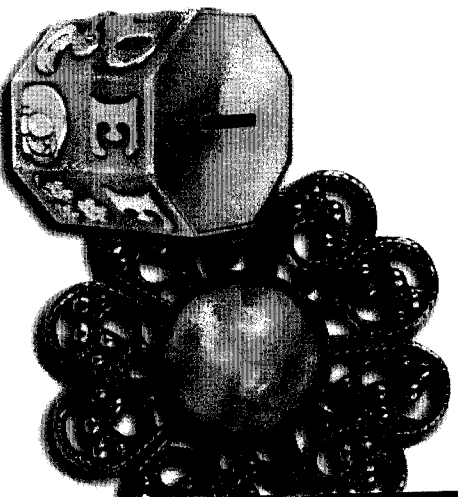

Silversmiths are practical metallurgists who understand the properties of the metals they use. They know when to anneal a work-hardened piece and how to use work hardening to their advantage.

Planishing is the process of

smoothing the finished piece, so

hammers used in this process must be fairly specialized to do the job.

Some planishing hammers have both a round face and a square face.

The square face is helpful for working with the corners of rectangular pieces. One of the final steps in silversmithing, planishing work hardens the metal while giving its surface a much more uniform appearance.

Basic Silversmithing Tools


Silversmiths use many of the same tools as other craftsmen, but because the objects silversmiths create are smaller, their tools are scaled accordingly.

Hammers


The hammers used by silversmiths have specific shapes that have been refined over thousands of years to perform specific purposes. Each hammer's face has a slightly different curve.

Raising hammers and *forming* hammers are used for making curved shapes. A *planishing* hammer is used to remove dents made by other hammers during the raising and forming stages. Forging hammers are used to fashion an object from thick material. Because forks, spoons, and ladles, for example, are often made from heavy-gauge metal, forging them requires a much heavier hammer. Forging hammers usually weigh 18 to 24 ounces.

Raising hammer

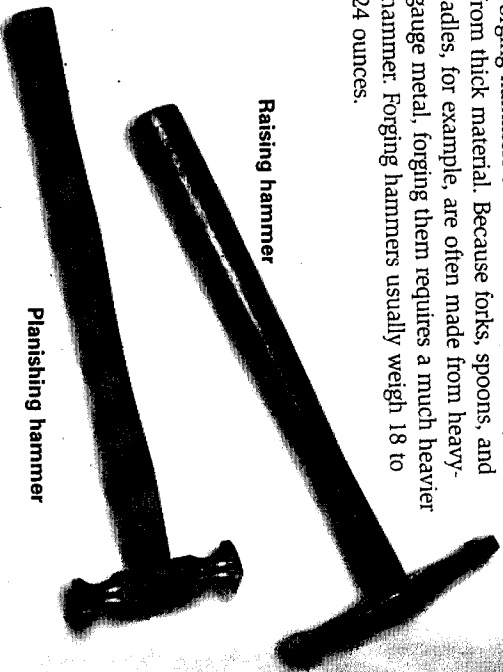

Planishing hammer

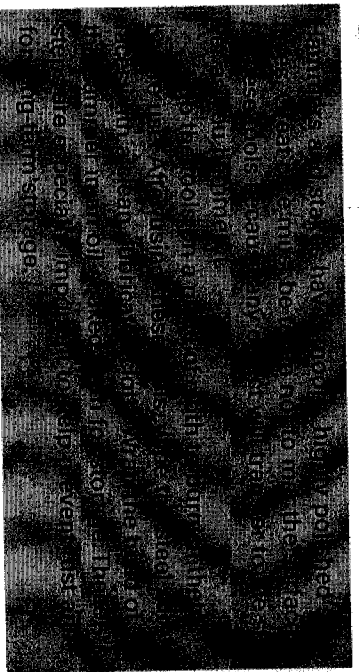

Mallets


Like the other metalworkers, silversmiths use mallets to bend sheet silver. Made of rawhide, hardwood, plastic, or nylon, these soft-faced mallets are less likely to mar the surface of the metal than a metal hammer. Some silversmiths glue leather to the faces of their wooden raising mallets to cushion blows even more. Mallets are used to true up, or straighten, pieces that have become warped or bent during *sinking* or raising steps.

Stakes and Anvils


Silversmiths use some of the same stakes and anvils as sheet metal mechanics and tinsmiths, such as the bottom stake and the ball stake. Some stakes silversmiths use look the same as other craftsmen's tools but are much smaller in scale. In other cases, some of the silversmith's stake anvils are uniquely different.

The raising stake is an example of a stake that is uniquely the silversmith's. Used with a raising hammer (a hammer with a head that has a similar curve to the desired curve), the raising stake is used to curve flat sheets of metal. Water pitchers, bowls, and flower vases, for example, start off as flat disks of silver, and the raising stake or hammer lifts—or raises—the metal to form the shape.

A silversmith's anvil is kept highly polished and unmarred. To keep an anvil "perfect," take care to avoid striking it with a hammer when working a bend or curve in a project.

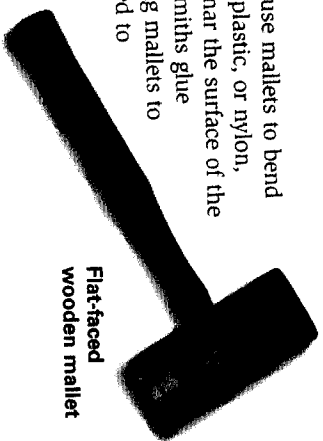

Flat-faced wooden mallet

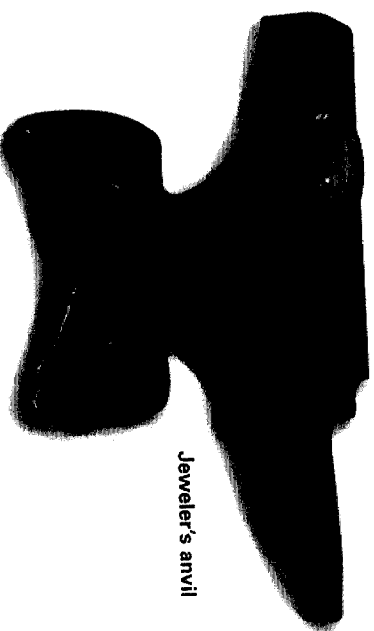


Jeweler's anvil

Sawing Equipment

Silversmiths consider both saw blades and files to be sawing equipment. One of the most basic skills of a silversmith or jeweler, sawing is used to cut openings in decorative shapes along the edges of objects. The equipment needed for sawing is minimal: a saw frame, a saw blade, a *bench pin* to hold the metal still during sawing, and a C-clamp to hold the bench pin to the workbench.

While saws are used for cutting larger pieces, small files are used to refine the shape of silversmiths' designs. Small, straight files called *needle files* are commonly used, and curved files called *riffler files* come in handy for specialty pieces.

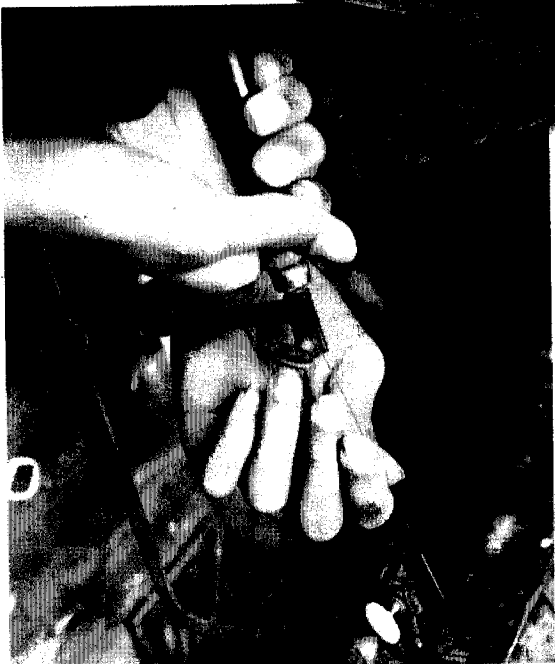


Bench pin

Be sure to purchase the proper saw blades for the project. Saw blades can be inexpensive, but cheap, flimsy blades are no bargain. At the least, buy blades of good enough quality to avoid frustration. Match the thickness of the blade to the thickness of the piece being cut. Make sure that at least three teeth touch the metal at all times.

Pickling Solution

Silversmiths use an acid bath called pickling solution to remove residue left after soldering and oxidation caused by heating during the annealing process. A solution of 10 percent sulfuric acid and 90 percent water is often used. Commercial pickling products are available in a granular form to be mixed with water as needed.

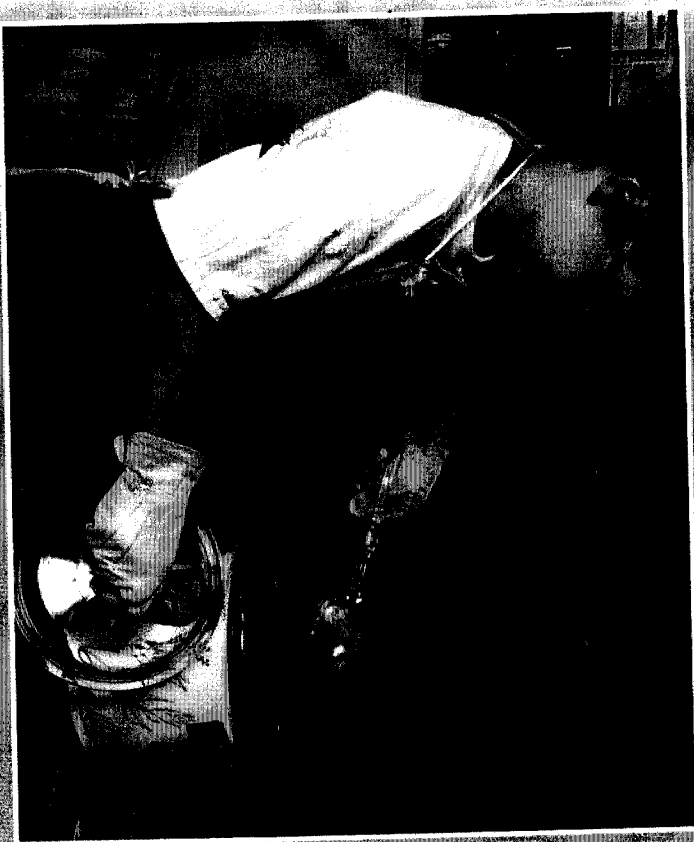


Never use a steel item to reach into the pickling solution. If you do, everything in the solution will become copper-plated. This is because the pickling solution removes some of the copper found in sterling silver. Once the steel item is removed, the solution will be fine again, but the plated objects must be polished heavily to remove the copper layer.

To remove items from the solution, always use sticks or tongs made of wood or copper. Rinse the pickled object in fresh water and dry it completely. Also, never leave soldered work in the solution for more than a couple of hours—it will weaken solder joints.


Basic Silversmithing Skills

While they know the basic techniques of metalworking, silversmiths must know some techniques that are specialized for the types of materials and tools they use.

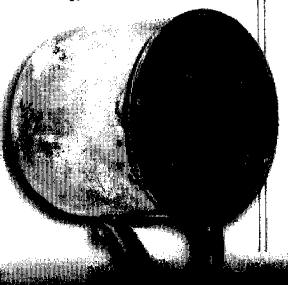

Laying Out Lines

One old saying, "Measure twice, cut once," is good advice when it comes to laying out lines. When using dividers, loosen the set-screw and place the tips against a steel rule. Holding one tip firmly at the zero point, spread the dividers until the second tip has reached the desired measurement. Lock the setscrew in place to hold the legs securely and use the tips to mark off the line.

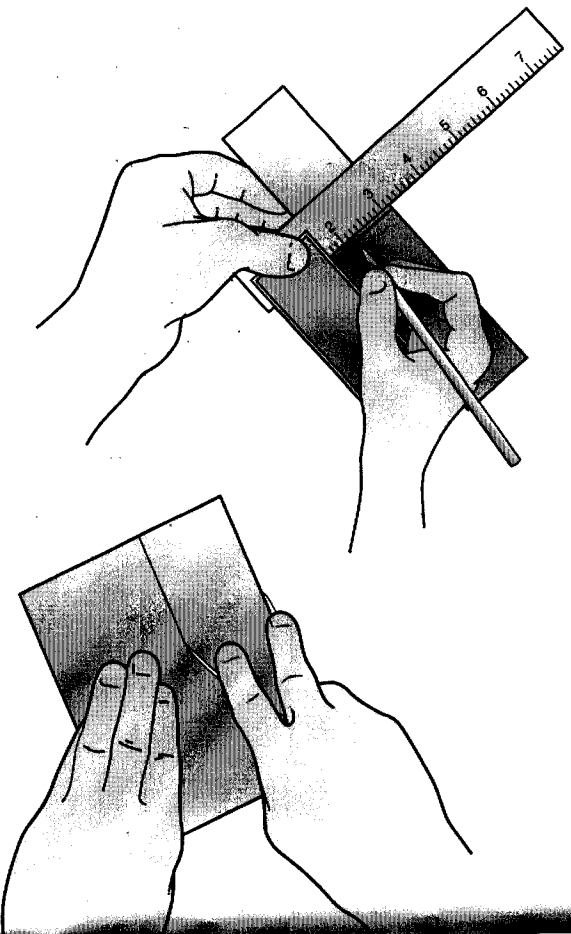

Use a square to establish a 90-degree corner, checking from both sides to be certain the angle is correct.


To lay out a strip with parallel sides, drag one leg of a divider along a prepared edge. Scrub the metal with a scrub sponge in a circular motion so the scratch line shows clearly.

Sawing

While sawing might seem to be a fairly basic and easy skill to master, care must be taken when it is used as a metalworking technique. The jeweler's saw is a common sawing tool used by silversmiths, and it must be handled with care to prevent injury and ensure proper use.

To use the jeweler's saw:

- Step 1**—Make sure the blade is firmly attached to the saw frame, with the teeth pointing toward the handle.
- Step 2**—Hold the saw so the blade is perpendicular to the work. Reach under the bench pin to do this properly. Take care not to jab at the metal.
- Step 3**—When preparing to saw, relax your grip. Let the saw blade do the work.
- Step 4**—Use long, relaxed strokes to saw. Periodically touch a piece of beeswax or candle wax to the blade as a lubricant.
- Step 5**—Turn the work while sawing. Be careful not to turn the saw.

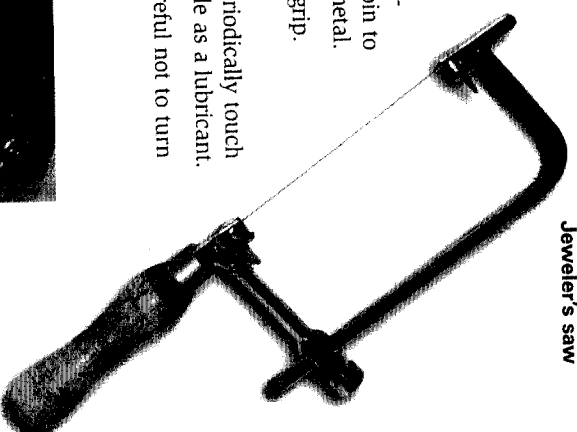

Jeweler's saw



Sinking


To a silversmith, sinking means hammering a depression into a piece of flat metal. This technique, which stretches the metal, is used to make bowls, plates, and serving trays. Most objects that use the sinking technique consist of three parts:

- The rim—the flat part used to pick up the object
- The *bouge*—the curved sides of the depression
- The *platewell*—the horizontal bottom of the piece into which the bouge transitions

Sinking very shallow forms can be accomplished by using a sandbag and a hammer, but it takes considerable time to achieve the desired depth. Because the sand shifts under each blow, the metal does not move a great deal.



Using a sinking block yields faster results. Hammering the metal over a depression carved into a block of hardwood such as beech or maple allows for greater stretching with each blow, with the sides of the wooden block supporting the metal as it is stretched to the desired depth and shape.

However, the final form should not conform to the depression. That is, don't hammer the metal until it is driven to the bottom of the depression (called "bottoming out")—this ruins both the surface of the sinking block and the work. Bottoming out puts dents in both items because the metal can no longer yield in two directions as it could when it was suspended over the curved depression. When the hammer squeezes the metal between itself and the block, the metal will push out to the side around the hammer-head, forming a dent.

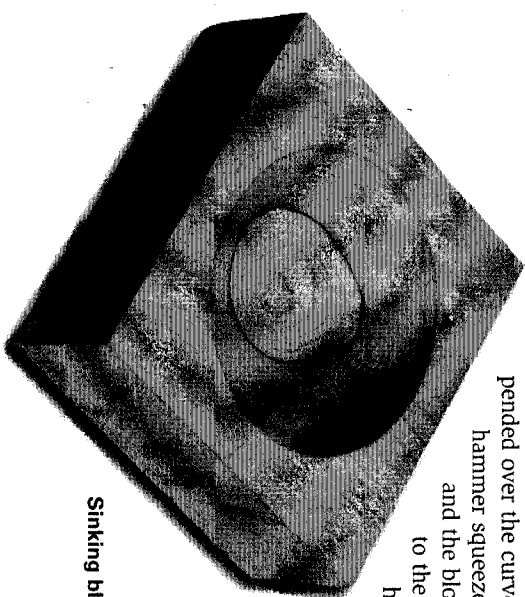


Sinking block

One way to create a sinking block is to cut a hole in a thick piece of hardwood or plywood (1). Drive roofing nails along the edges and attach the metal to the board by holding the work in place with the nail heads (2). Using a silversmith's hammer with a head that has a radius that matches the desired curve of the bouge, tap the metal along the inside perimeter of the hole, driving the metal into the gap between the surface of the workbench and the top of the board (3). Work the metal until it almost touches the bottom surface—remember that you are stretching the metal when you are using the sinking technique.

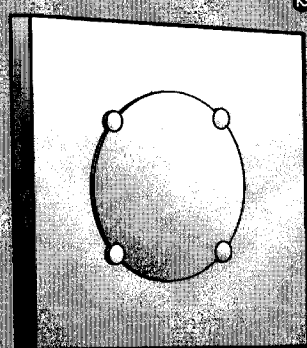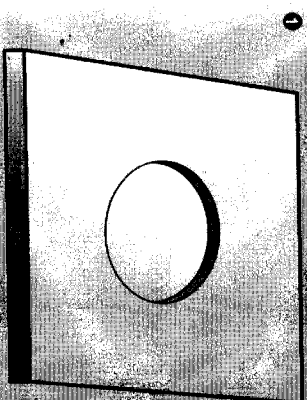

The bowl of the tray or plate cannot be created with only one sinking step. Trying to do so will stretch the metal so much that it will tear, so several sinkings will be necessary. Be sure to anneal the object between each sinking and remove the nails after the first sinking.

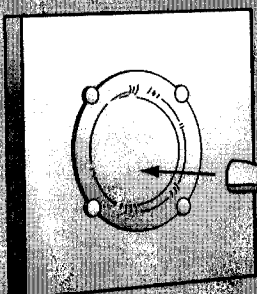

Soldering

Soldering is a basic skill used often by silversmiths. As with most skills, practice at soldering will help you achieve better results.

SWEAT SOLDERING

At times you may wish to apply a special piece to the surface of another. Perhaps you have fashioned a small fleur-de-lis that you would like to attach to a flat disk that will become the front of a neckerchief slide. To attach that fleur-de-lis without obvious signs of soldering, use the sweat soldering technique.

Step 1—Turn the fleur-de-lis on its back and melt on a couple of small pieces of silver solder. Do not let them flow away; just heat them until they have attached themselves—they should still be small blobs of silver solder at this point. Set the piece aside.

Step 2—Place a small amount of flux on the disk where you want to attach the fleur-de-lis.

Step 3—Carefully position the back of the fleur-de-lis onto the flat disk. Play the torch flame over the fleur-de-lis until the silver solder flows. Be careful not to let the silver solder flow out from under the fleur-de-lis. The attachment should look as if you carved it in place.



Preserving Your Work

Silver, copper, and brass must be polished regularly to prevent oxidation from dulling and putting the finish. Apply a liberal amount of a good-grade polish to a lint-free cotton cloth, and take your time as you polish. Working on small sections and using a circular motion, rub the pumice into the metal until it is polished to a high luster.


Silversmithing Projects

Listed below are the basic tools and materials needed to make the projects shown in this pamphlet. You don't have to buy specialty tools from catalogs; many of these tools can be made from things found in scrap yards.

Basic Tools Needed

- ☐ Raising hammer
- ☐ Planishing hammer
- ☐ 16-ounce mallet
- ☐ Flat-faced wooden mallet
- ☐ Peen-ended wooden mallet
- ☐ Raising stake
- ☐ Bottom stake (optional)
- ☐ Ball stake
- ☐ Stake holder (optional)
- ☐ Stump (used to mount the stake holder)
- ☐ Flat files
- ☐ Riffler files
- ☐ Jeweler's saw
- ☐ Jeweler's saw blades
- ☐ Bench pin
- ☐ Sturdy wooden bench
- ☐ Sheet metal snips
- ☐ Try square
- ☐ Metal straightedge
- ☐ Fuller
- ☐ Scarber
- ☐ Steel dividers
- ☐ Center punch
- ☐ Silver solder (at least three types, of different melting temperatures)
- ☐ Flux (borax paste)
- ☐ Brazing station (several hearth bricks or pea gravel in a heavy pan, avoid using aquarium gravel coated with epoxy)
- ☐ Pin-flame propane torch
- ☐ Sinking block (your choice of hole diameter)
- ☐ 10-gallon or larger pickling tank with close-fitting lid



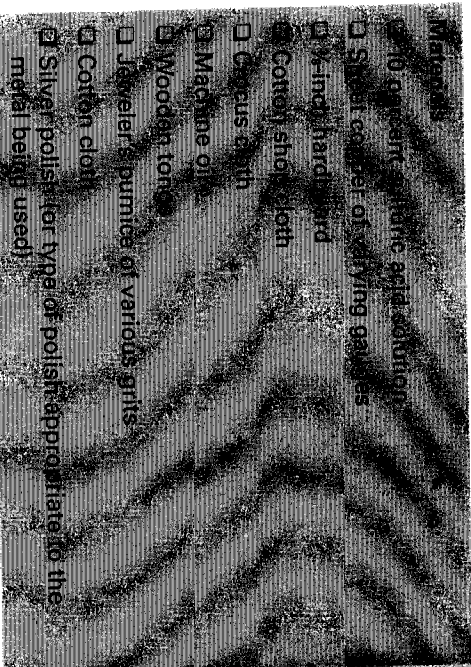


Forging a Spoon

Copper has the same properties as silver and is less expensive.

The spoon project is hammered cold using a piece of 18- or 20-gauge sheet copper. As you forge the bowl of the spoon, you may find that you need to soften the metal. Remember that nonferrous metals are annealed by heating them to a red heat and then quenching them in water. To meet the requirement for a soldered joint, you may wish to fashion a small Boy Scout fleur-de-lis and apply it to the handle of the spoon by using the sweat soldering technique.

Step 1—Use a marking pen to draw the pattern onto the metal. Be sure to mark out the dotted line—this gives you sufficient material to make a fairly deep bowl.

Step 2—Using a jeweler's saw and a bench pin, saw out the basic shape of the spoon.

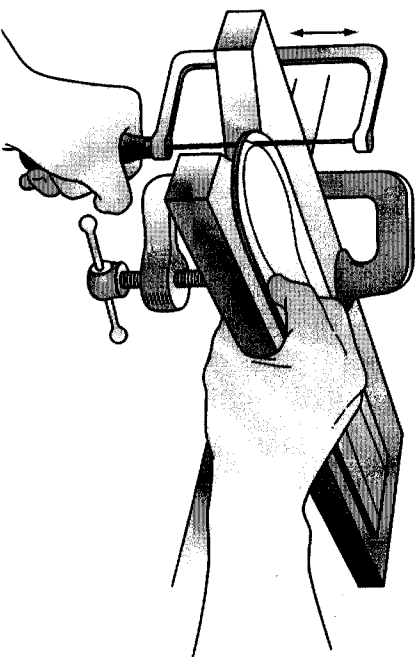

Step 3—Using a forging hammer to thin the metal in the bowl of the spoon, strike a series of blows beginning in the center of the bowl and working out to the edge.



Step 4—Using a bouge and a curve-faced hammer, sink the spoon's bowl. Place the bowl of the spoon over the cavity and stretch the bowl using a silversmith's hammer that has a radius that corresponds to the radius of the bouge. Remember to stop hammering before the metal touches the bottom of the bouge to help prevent denting the bouge. If the edge of the bowl warps, place it upside down on the anvil and tap it back into line with a wooden mallet. Anneal after each sinking.

Step 5—Once the bowl has been drawn out to the proper width and thickness, forge the spoon handle. Working along the spine of the handle, strike from the center outward. Flare the end of the handle and keep it narrow near the bowl. Use a kitchen spoon as a guide. Anneal as often as necessary.

Step 6—File the edges of the spoon smooth. Be careful not to scrub the file back and forth. Push the file away from you to remove metal, and lift it up on the return stroke. This keeps the file's teeth sharper longer.

Step 7—Soak the finished spoon in the pickle bath for about 20 minutes to remove oxides and fire scale. Use wooden tongs to retrieve it from the pickling tank to avoid accidentally staining the piece. Flush the piece with plenty of water to neutralize the remaining acid, then dry it with a clean cloth.

Step 8—Polish your work. Remove the swirls and manufacturing marks by rubbing the piece with pumice. Start with a coarse grit and gradually move to finer and finer grits as the desired degree of shine appears.

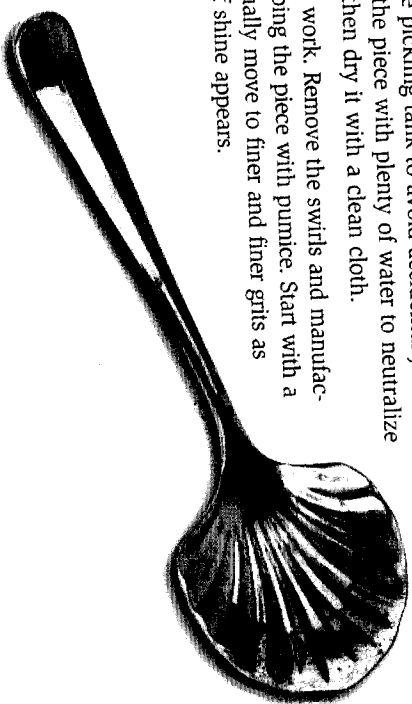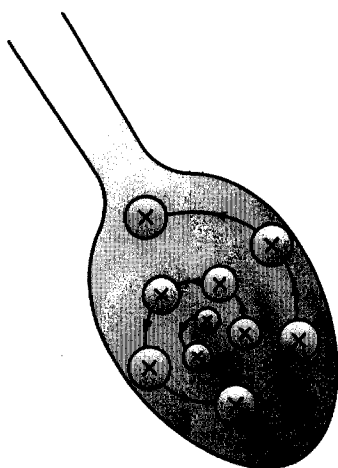

The Founder



A person who pours molten metal into molds is called a founder. Ancient humans began melting metal and pouring it into molds almost as soon as they discovered how to hammer it into shape.

Numerous industrial companies cast metal, and most city telephone books will contain a listing for at least one *foundry*. Not all foundries are huge factories employing scores of people. Some smaller foundries specialize in producing hard-to-cast shapes using hard-to-cast metals and cater to artists whose sculptures will become patterns for limited-edition castings. In some cases, the artists operate their own foundries and make their own castings. Increasingly, hobbyists are casting metal on a small scale in their garages and workshops.

Basic Tools and Skills

Founders use skills and techniques that are different from other metal workers. Their craft includes making and working with molds to create pieces from molten metal. While some founders use premade molds to cast the metal shapes, many founders are involved in every step of the creation process, including carving or sculpting their own patterns to shape the molds.

Keep in mind that working with molten metal is dangerous. Always have adult supervision when working with any of these techniques.

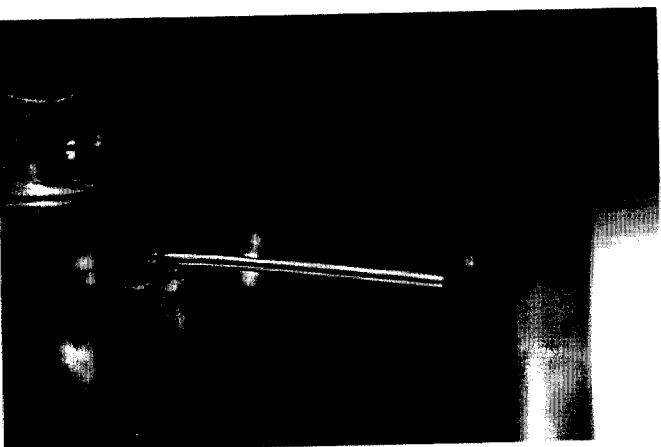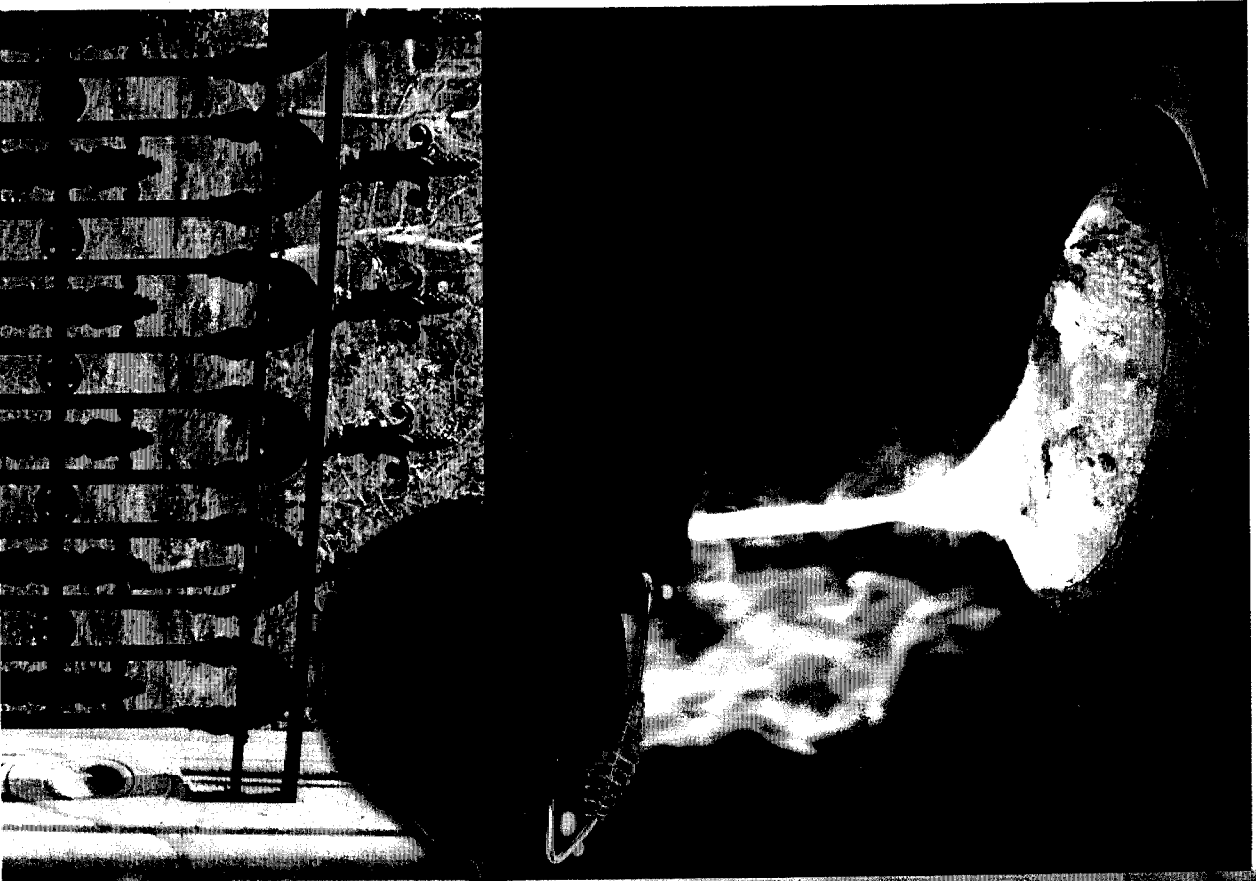

Making a Pattern

The *pattern* must be created before the mold can be made. The first step is to draw a full-size sketch of the object. This two-dimensional drawing will have to translate into a three-dimensional object, so limit the depth of the object to about 1/2 inch.

Sketch the pattern with the finished piece in mind. Pieces designed with projecting elements such as extended arms or legs modeled in running poses cannot be cast in one piece because the arm or leg will stick in the mold and prevent the piece from being released. Keep the design simple and within your capabilities to create a model.


Designs with slightly beveled sides (called *draft*) rather than perfectly straight sides are more easily removed from the mold. Only three or four degrees of draft are necessary, so you can still give the illusion of perfectly straight sides. Avoid undercuts (sometimes called "ledges") that will jam in the mold, making it impossible to remove the finished piece.

The next step in pattern making is to sculpt the model using sulfur-free polymer clay. Use a variety of tools to creatively carve the details of the piece. Follow the clay manufacturer's instructions to bake the model until it is hard.

Making a Mold

When the pattern is complete, it can be used to make a mold, which will hold the molten metal until it is hard. Mold makers can choose from at least four different types of molds for casting metal:

- **Lost-wax mold**, in which the wax pattern is eventually burned out of the mold, forming a highly detailed cavity
- **Rammed-sand mold**, which is made by compressing a box of fine-grained sand around a pattern
- **Metal molds**, which became popular during the industrial revolution and are the most expensive type of mold

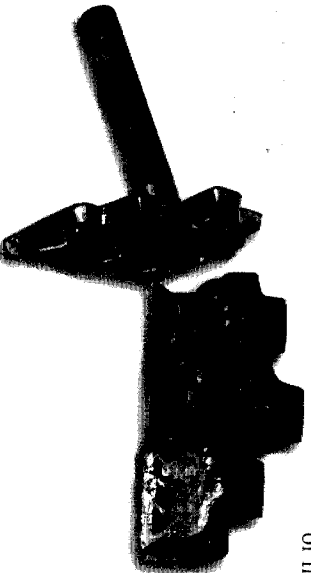

- **Rubber molds**, which are durable and reusable molds

most often made from room-temperature vulcanizing (RTV) silicone rubber

No matter which mold-making method is chosen, remember to include *vents* and a *sprue*—the opening in the mold through which the molten metal will be poured.



Casting Molten Metal

In metal casting, the metal is heated to its melting point and poured into a clean mold. Using an electric melting pot with a thermostat and a bottom-pour spout will help control the temperature of the metal and help prevent impurities from entering the mold when the molten metal is poured.

Mold lubricants, such as finely powdered graphite, help the molten metal flow into the mold and prevent the metal from sticking to the mold when it is being removed. The lubricant should be smeared into a fine coating that thoroughly covers the piece like grease. Use a stiff-bristled brush to work the lubricant into the crevices of the mold.

A metal mold should be preheated by making two trial runs before the final cast is poured. This is another secret to making high-quality castings. The castings made with the trial runs will be flawed, but mistakes can be melted down for another try. Save these pieces for later, because adding them to the pot will add wait time while the metal completely melts again.

For your health and safety, use lead-free pewter. Lead ingots leave lead particles on the skin and can get into your food and your body. Molten lead produces dangerous fumes. Lead poisoning causes brain damage. Using lead-free pewter will prevent all these problems.

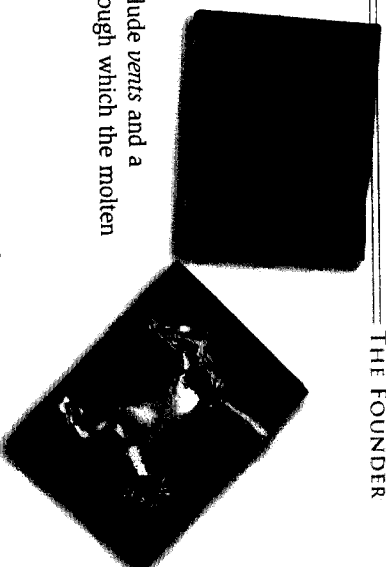

The process of applying

lubricants to a mold is called *blackening*, because early

silversmiths would hold their molds over a candle flame, letting the soot coat the mold.

Always place the mold as close to the melting pot as possible. Some snelling pots allow the mold to be filled directly from the bottom of the pot to prevent the dross—impurities that float to the surface of molten metal—from being poured. If a transfer ladle is used to fill the mold, the dross must be skimmed off before the mold is filled. Once the transfer ladle is full of molten metal, move quickly to minimize heat loss. Pour the molten metal at a rapid and steady rate.

The piece should be allowed to cool completely before disassembling the mold and removing the piece from it. Any scars in the metal left as evidence of gates, vents, and *parting line* flash can be filed and polished until they are no longer detectable.

Preserving Your Work

Always apply a finish to preserve it from oxidation.

thin coats of paint so that you do not obscure the figure's details and so that the paint does not sag and drool.




Casting Projects

Use the following checklist to gather the tools and materials necessary to complete the founder option requirements for this merit badge.

Basic Tools Needed:

- For creating a V-slice mold:
- ☐ Four spring gloves
 - ☐ Two silicogelable brushes (one for spreading the glue, the other for applying the granulated mold)
 - ☐ Disposable rubber gloves
- For cleaning the palette:
- ☐ Sculptor's palette
 - ☐ Hobby knife
 - ☐ Toaster oven
- For creating the molded model:
- ☐ Shaping medium
 - ☐ Thermos
 - ☐ Pot of water
 - ☐ Heavy-duty rubber tapping tool for use as a tapping station
 - ☐ All-purpose premade mold of a simple rubber mold
 - ☐ About-made silicone rubber mold
- For finishing the model:
- ☐ Primer, needle, and sand files
 - ☐ Standard piece of wire
 - ☐ Spring clamps
 - ☐ Hobby knife
 - ☐ Shop apron
 - ☐ Insulated leather gloves
 - ☐ Safety glasses
- 

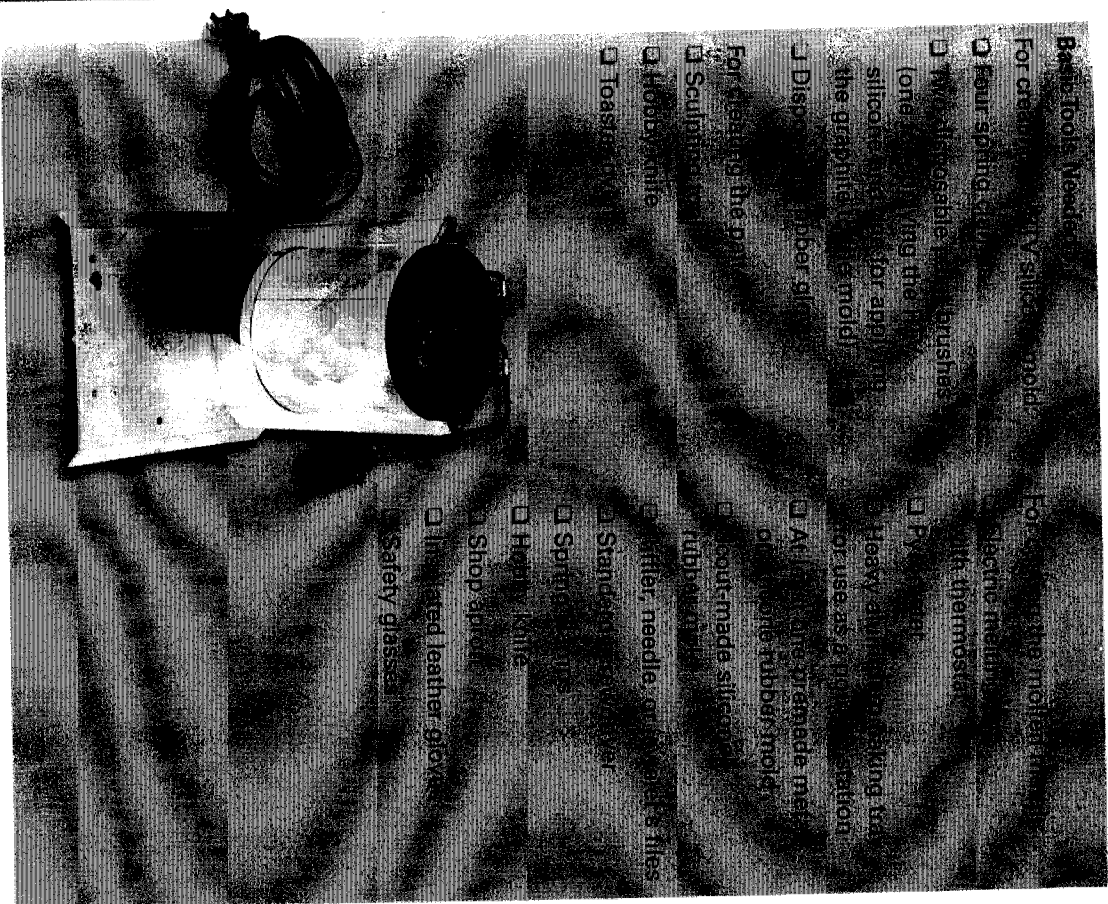

Materials**For creating the pattern and mold:**


- ☐ 12 panels of 4-in plywood or hardboard cut into 4-by-6-inch rectangles
- ☐ Two 4-by-6 pieces of fiberboard
- ☐ Four small wooden pegs, each about an inch long
- ☐ One pound of sulfur-free polymer modeling clay
- ☐ Plastic wrap or aluminum foil
- ☐ Approximately 16 ounces of two-part RTV silicone rubber for one figure that is 2 1/2 inches tall by 1 inch wide by 1/2 inch deep
- ☐ Four disposable mixing cups. Two of the cups must be large enough to hold the contents of each rubber pour.
- ☐ Two disposable mixing sticks
- ☐ Approximately 1 ounce of release cream (petroleum jelly is effective)
- ☐ For casting the molten metal:
 - ☐ A scout-mold pattern
 - ☐ An instructor-provided mold
 - ☐ Fine graphite powder
 - ☐ Lead-free pewter (approximately 2 ounces per each 54-millimeter figure)
 - ☐ Temperd hardboard, 1/4 (0.25) thick, cut in pairs to the size of each rubber mold
 - ☐ Soap and water to clean graphite from hands
 - ☐ Paper towels

Preparations

- ☐ Collect all materials before starting.
- ☐ Choose a well-ventilated spot.
- ☐ Determine where to place the sprue and vents on the pattern.
- ☐ Make the sprue and vents from wax, wood, or sulfur-free clay before mixing the RTV silicone rubber.
- ☐ Make locator pins before mixing the RTV silicone rubber.
- ☐ Measure the pattern against the stock of box-making panels and select those large enough for the necessary clearance.


Making a Silicone Rubber Mold

Step 1—Study the pattern and decide where the parting line should be and where to place the sprue and vents. When deciding where to place the sprue, choose a location such as the bottom of the piece where no one will see where the sprue is attached. In this example, the sprue will be attached to the bottom of the truck-shaped pattern. Use some of the polymer clay to make a cone-shaped sprue and one or more vents.

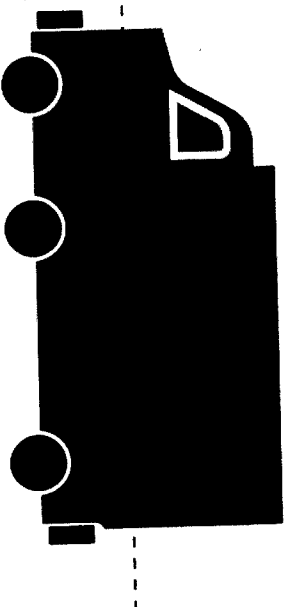

The dotted lines drawn on the pattern above indicate where the parting line will be.

Step 2—Make a molding flask out of pieces of plywood or hardboard. Use some of the sulfur-free clay to hold the pieces together. Make sure there is a minimum clearance of 1/2 inch all around the model. If the pattern will be embedded in a layer of clay, estimate how thick the clay will be. Holding the pattern in the box to simulate for the clay layer, check for at least 1/2-inch clearance from the top of the embedded pattern to the top of the box.

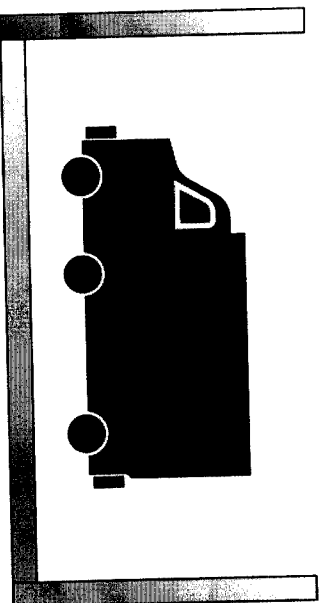


As the box is built, place the pattern in it and check it for fit.

Step 3—If the flask is made of loose panels, make sure that there is a good seal with the polymer clay to prevent the RTV silicone rubber from leaking. Wrap a rubber band around the panels to hold them together.

Step 4—Spread a layer of polymer clay in the bottom of the flask. Make it deep enough to prevent any part of the pattern from touching the bottom of the box as it is pushed into the clay down to the parting line in step 6.

Step 5—Wrap the portion of the pattern that is to be embedded in clay with aluminum foil or plastic wrap. This will prevent it from picking up any clay residue that will obscure the details when making the second half of the two-piece mold.

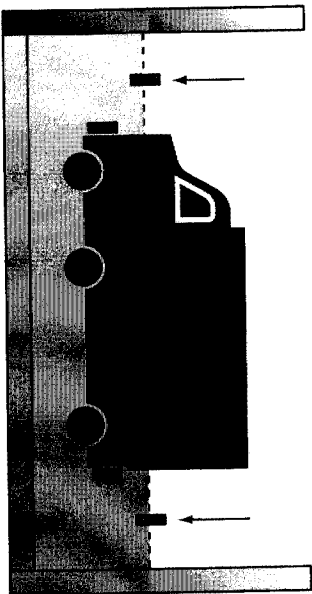

Step 6—Embed the wrapped half of the pattern up to the established parting line. Make sure that no part of the pattern touches the bottom board.

Step 7—Insert the two alignment pegs into the clay. Putting the pegs in opposite corners (about $\frac{3}{4}$ inch from the corner) will locate the two halves correctly. Attach the pouring gate and vents to the model.

Step 8—Using disposable mixing sticks, prepare the RTV silicone rubber according to the manufacturer's instructions. Be sure to wear rubber gloves when working with the liquid silicone rubber mixture.

Step 9—Brush a thin layer of mixed RTV silicone rubber over the pattern. This will discourage the formation of air bubbles in the small crevices.

Step 10—Holding the container as close as possible to the flask, slowly pour the mixture over the pattern, allowing it to fill all the crevices and to level off. Continue pouring until the top of the RTV silicone rubber is a minimum of $\frac{1}{2}$ inch above the highest point of the model. Lift an edge of the tile about a half inch and let it fall quickly, lightly rapping the piece on the table a few times to drive the bubbles to the surface.

Step 11—Place the top board on the flask.

Step 12—*Cure.* Allow the chemical reaction to progress by letting the piece rest until the RTV silicone rubber has hardened to its maximum amount. This will take eight hours at room temperature.

Step 13—Invert the flask and disassemble it. Remove the clay, the foil or plastic wrap, and the alignment pegs.

Step 14—Reassemble the flask and attach the pouring sprue and vents. Use clay to hold the flask together.

Step 15—Apply mold release cream to all of the exposed areas of the cured silicone rubber. The silicone rubber only sticks to itself.

Step 16—Repeat steps 8 through 12 to create the second half of the mold.

Step 17—Disassemble the box and separate both parts of the mold from the original. Remove the pattern.

Step 18—Check the sprue and the vents to make sure they are not constricted. If they are, use a hobby knife to cut the RTV silicone rubber. The molten metal will be poured into the mold cavity through the sprue, and the air will escape through the vents.

Step 19—Reunite the two halves of the mold, making sure that the silicone alignment pins drop into the holes. Place a piece of thin plywood or a tempered hardboard panel on the front and back of the mold to reinforce the rubber. Use two spring clamps and press two panels together opposite the sprue. This will help prevent the molten metal from leaking out.

Tips for Casting Lead-Free Pewter

Lead-free pewter is composed of 91 percent tin. The remaining percentage is made up of copper, antimony and bismuth. Metals with a high tin content have excellent flow characteristics and work well with highly detailed figures. Pure tin is the best material for pouring figures, and figures made from pure tin can easily bend without breaking. Following these tips will yield the best results.

- Tin fumes are toxic, so be sure to do your melting and pouring in a well-ventilated area, and keep your head away from the melting pot.
- Heat the metal to between 550 and 650 degrees. Use a thermometer to obtain the correct temperature. Use the lowest temperature you can that produces good castings.
- Wait at least 15 minutes after the metal has melted before pouring the mold.

Using a Silicone Rubber Mold

Step 1—Use graphite powder to lubricate the rubber mold.

This will help prevent the cast metal from sticking to the rubber and will help the molten metal to flow freely through the smaller parts of the mold. With an applicator brush, dust a small amount of finely powdered graphite over the mold and then smear the graphite into a greasy coating with your fingertips. Clap the molds together to remove any excess powder.

Step 2—Position the tempered hardboard mold supports on the outside of each mold half. The mold should be clamped in at least two positions with spring clamps for best results.

Step 3—Heat the lead-free pewter to between 550 and 650 degrees. Use the coolest temperature that you can to obtain good quality castings. Experiment with the melting pot's heat settings to discover where the coolest temperature is.

Step 4—Pour the metal quickly into the mold, filling it to the top. If the mold fills too slowly, widen the throat of the sprue a little bit. A slow-filling mold will let the metal solidify prematurely, preventing the figure's extremities such as hands and hand-held objects from filling with metal. Use a sharp hobby knife, a small file, or a rotary burr to remove a small amount of the rubber from both halves of the mold.

Step 5—Using gloved hands, squeeze the sides of the mold together after pouring. Tap the mold gently on the work surface at the same time to help improve the detail and reduce the flashing (the small amount of metal that leaks around the parting line) around the figure. Always wear insulated leather gloves when pouring and holding the mold. Allow the mold to set for at least one minute before opening it. When the figure is being released from the mold, the mold can be bent slightly, if necessary.

Properly handled, the rubber molds will give you long and continuous use. Allow rubber molds to cool after each use. Because rubber is not as good a conductor of heat as is metal, the rubber molds retain the heat of the hot metal longer than a metal mold. Continuous rapid pouring can overheat and burn a rubber mold.

Using Multipart Molds

Complex figures must be cast in a slightly different way. For example, you might have created a figure of a man holding a flag in front of his body with his right hand. This figure cannot be cast as it was sculpted because the out-thrust arms cannot be released from the mold without destroying the mold. To avoid this, the right arm is carefully sawn off the sculpture and cast as a separate piece. Here is how.

Step 1—Center the figure's body in the mold, with the right arm placed nearby and off to one side and a connector called a "gate" dug between the two pieces. This permits the molten metal to flow from the body, along the gate, and into the component.

Step 2—Since you know that the figure's arm must be assembled onto the body, put a dab of clay on the inside of the arm at the shoulder joint and fashion it into a small pin. Place a small depression, the size of the pin, in the figure where the arm will attach. Once the mold is cast, file the arm into its finished shape and attach it to the torso using two-part epoxy glue.

The flagpole is cast as a separate item and attached to the figure later. Use paper to make the flag, and paint it using acrylic or enamel hobby paint.

The Blacksmith

When the Worshipful Company of Blacksmiths, a craft guild, was formed in London during the 12th century, its motto was "By hammer and hand, all arts do stand." This was not an idle boast. Before the availability of less-expensive machine-made products drove them out of business during the industrial revolution, blacksmiths were truly important craftsmen because they made the iron and steel tools that were used by other craftsmen. They also made all the iron hardware and kitchen equipment that was used by people from all walks of life.

Today there is a tremendous interest in preserving this craft. In addition to the smiths who are working to rediscover the techniques of the old masters, today's blacksmiths are also artists, making all sorts of imaginative things from hot steel.


Because of the high temperatures generated by the forge, Scouts who select this option must work under direct adult supervision.

Some blacksmiths in large cities concentrated upon making artistic items for use by architects and builders, specializing in making ornamental ironwork such as fences, gates, railings, balconies, and elegant sign frames.




Basic Blacksmithing Tools

The blacksmith's tools have remained unchanged for thousands of years, and the blacksmith still uses the most basic elements—fire, water, and iron—to fashion both practical objects and objects of art.

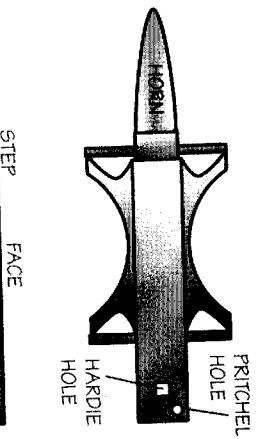

Although an anvil is a sturdy chunk of metal, it is not a tool that can be abused with arbitrary or purposeless hammer blows. Doing so will leave pits and marks on the working surfaces that will show up on worked objects. Never strike the anvil directly with a hammer. Always have a piece of metal between the hammer and the anvil to avoid making dents and dings.

The anvil's step is used for cutting metal, so it most likely will have dings and chisel marks. The face is where most of the work is done, so it must be kept free of any marks and imperfections. The heel has a square hole called the hardie hole and a round hole called the pritchel hole.

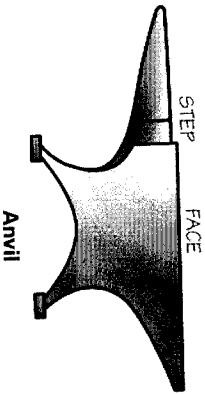


A hardie is a chisel-shaped tool with a square shank that sits in the hardie hole and is used with a hammer to cut iron and steel. A pritchel is a round punch; therefore, the pritchel hole is used to punch holes in hot iron and steel. The horn of the anvil is used to create scrolls and bend curves in bar stock. The leg vise is used to bend and twist hot iron and steel. The long leg sits in a cup attached to the shop floor. This gives the leg vise extra power to resist hard blows when a person is bending large pieces of metal with a sledgehammer.



Hardie

The modern blacksmith's forge has an electric bellows attached to the firepot by a short length of sheet steel pipe. By burning soft coal with a steady stream of air from the bellows, the forge fire can reach 3000 degrees. When forging, keep the steel between 1400 degrees and 1800 degrees. Low-carbon steel burns at about 2200 degrees. Because the forge fire generates such high temperatures, always be alert to avoid burning the steel.

Cross peen hammer

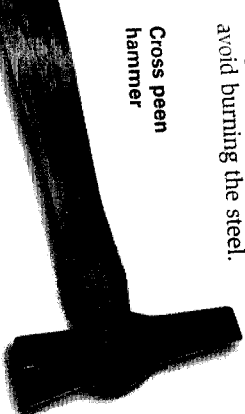


Forge



The *cross peen hammer* is the blacksmith's heavy forging hammer. Large ball peen hammers are also used to forge out items on the anvil.


If work is not planned properly and stock is cut too short to be hand-held while forging, tongs will be necessary. The tongs used most often have flat jaws to hold flat or square stock or curved jaws to hold round stock. Some tongs have a square groove to make it possible to grasp small-diameter square or round bars. Blacksmiths often make their own tongs to hold objects with unusual shapes such as ax heads.

Tongs

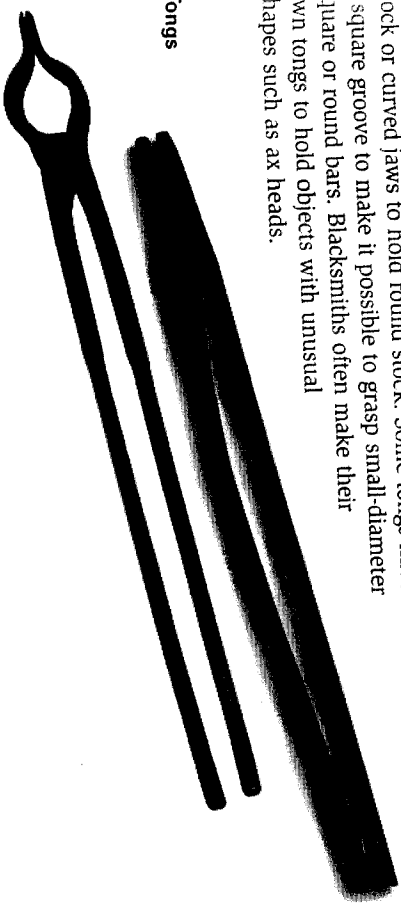

Basic Blacksmithing Skills

Naturally, there are some fundamental techniques that must be learned before making anything at the anvil. Because there is not room in this pamphlet for a complete treatment of the subject, only the most basic information and techniques are presented here.

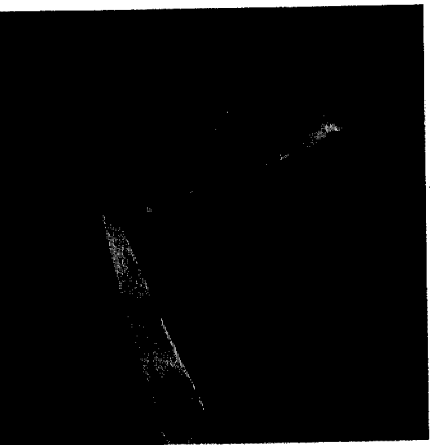

Think, "hit, rotate 90 degrees, hit, rotate 90 degrees," and so on until the taper is completed.

Forging a Taper

To forge a taper, hammer the end of a hot bar into a tapered point like that of a center punch. To avoid having to use tongs, cut a length of bar long enough to permit holding the cool end in your gloved hand when forging. To make the taper, tilt the hammerhead and hit the hot bar with angled blows.

Hit the hot end once and then rotate the bar 90 degrees and hit it again. Repeat this process of hitting and rotating the bar back and forth, forcing the hot steel into a taper.

This action is called *tumbling*.

Think, "hit, rotate 90 degrees, hit, rotate 90 degrees," and so on until the taper is completed.

Using the Horn of the Anvil

Position the hot steel on the horn so that the hot portion juts outward past the horn. Strike the hot section a soft blow, forcing it to bend over the curve of the horn. To keep from flattening the metal, hit it at an angle, and avoid hitting it straight down on the horn. Always hit the metal beyond where it touches the horn.



Hot steel can be bent over the horn of an anvil.

Using the Edge of the Anvil

Use the edge of the anvil to make L-shaped bends in objects. Heat the spot to be bent to an orange heat.

Position the hot spot on the outside edge of the anvil, letting the cooler tip project over the anvil. Tap the end of the bar straight on with a hammer, forcing the hot spot to bend over the edge. To square up the bend, tap the bend at the front of the anvil, where you can be sure to get a 90-degree bend. Be careful not to strike the bend at the corner of the anvil or you will squash the material there, weakening the piece.


Twisting Steel

Twisting is used to put a decorative element in square and flat stock. Heat a bar to an even orange color where the twist should appear.



Clamp one end of the hot steel bar in the vise, grab the other end near the hot section with tongs or a bar twister, and rotate the bar 360 degrees. An even heat means an even spiral.

Preserving Your Work

Paraffin wax makes a fine preservative. Be sure that you are wearing gloves because the metal will still be quite warm. Rub a candle stub over your work while it is still warm, letting the liquid wax flow into all the crevices. Be careful not to overheat your work because the wax will evaporate or burn off, which is ineffective. Just before the wax hardens, rub off the excess wax with a shop rag.

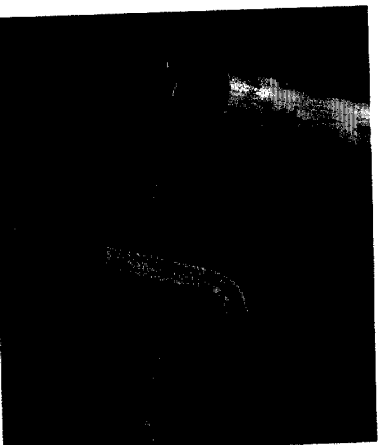

Bending steel over the edge of the anvil creates L-shaped bends.

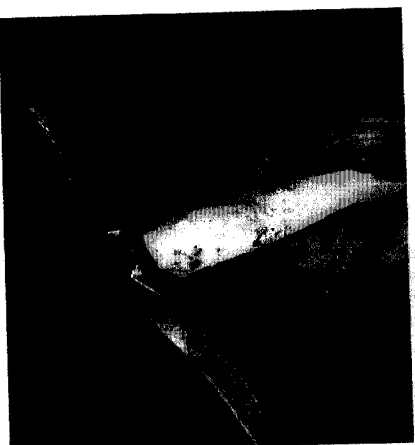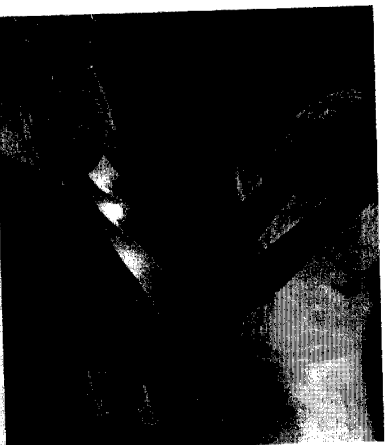

Basic Tools Needed

- ☐ 125-pound anvil (minimum)
- ☐ Stump cone for the anvil, one much taller one (for the vise)
- ☐ Two turnbuckles for securing anvil to stump
- ☐ Two 1/2-inch lengths of welded link chain to pass over the anvil's feet and connect to the turnbuckles
- ☐ Two eye screws to secure the turnbuckles to the stump
- ☐ Leg vise or large machinist's vise
- ☐ Firepot
- ☐ Metal forge top with legs
- ☐ Mechanical bellows
- ☐ Bellows pipe
- ☐ Measuring tape or folding rule
- ☐ Soapstone pencils (for marking steel)
- ☐ 24-ounce cross peen hammer
- ☐ 12-ounce ball peen hammer
- ☐ Hot handle
- ☐ Cold tongs
- ☐ Flat-tipped tongs
- ☐ 1/4-inch and 3/8-inch bell tongs
- ☐ Pea-sized soft coal, approximately 50 pounds per eight-hour day
- ☐ C-clamp or locking grip pliers
- ☐ Center punch
- ☐ Drill press
- ☐ Drill, sized to match the diameter of the nails used as rivets
- ☐ Shop apron
- ☐ Leather gloves
- ☐ Safety glasses

Materials

- ☐ 1/4-inch by 1/2-inch flat, mild steel (C1020, A36, or equivalent)
- ☐ 1/4-inch diameter mild steel (C1020, A36, or equivalent)
- ☐ 1/4-inch or 3/8-inch square mild steel (C1020, A36, or equivalent)
- ☐ 1/4-inch round or square medium-carbon steel (C1065, W1, or equivalent)
- ☐ 1/4-inch square, or 1/4-inch by 1/2-inch flat, medium carbon steel
- ☐ Tenpenny or larger nails
- ☐ Candle stubs
- ☐ Cooking oil

Blacksmithing Projects

The following projects are practical objects that a Scout can use while camping. Because the creation of art is personal to each artist, no art objects are illustrated. If you prefer to be artistic rather than practical, use your imagination and remember to apply the basic metalworking techniques.



Forging a Dutch Oven Lid Lifter

Step 1—Sketch the Dutch oven lid lifter to use as a pattern. The length of the lifter from the hook all the way around the handle should be about 16 inches.


Step 2—Using a hacksaw, cut a 16-inch length from a piece of 1/4-inch square mild steel.

Step 3—Place the metal in the forge, and bring the end of the shaft to an orange heat.


Step 4—Using tongs, remove the piece from the fire and forge a taper in the end of the shaft (A). Flatten the taper (B).

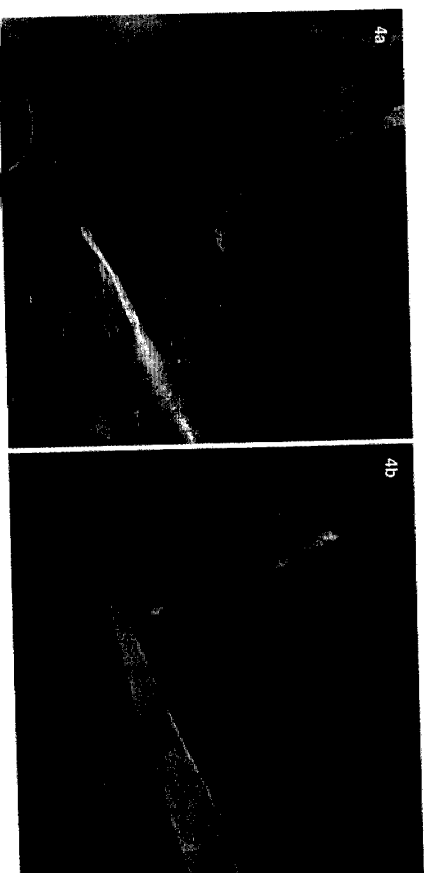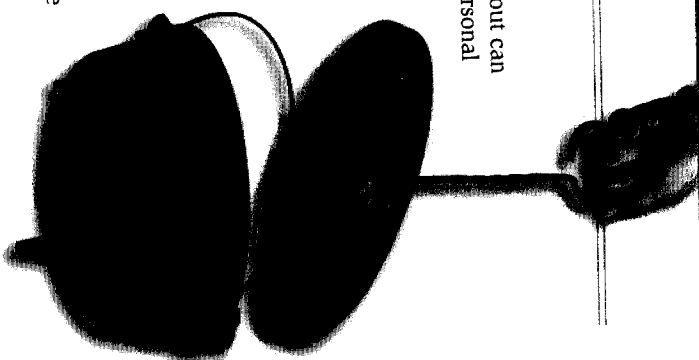

5a

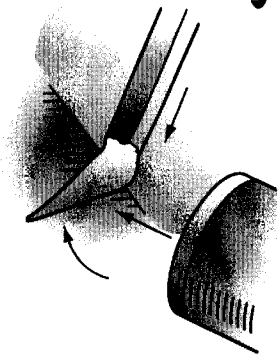

5b

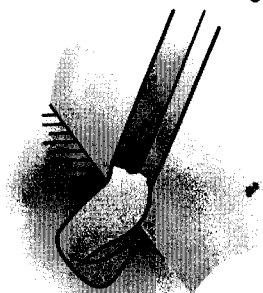


Step 5—Carefully reheat the flared taper and bend it about 30 degrees by tapping it over the edge of the anvil (A).


Bend the tip back (B).

Step 6—Reheat the hook end, then create the J-hook by bending it over the anvil horn. Bring the hook to the face of the anvil to "true it up," or straighten the bar, leave the J slightly open to make grabbing the oven handle easier. Plunge the piece in water to cool it.


6

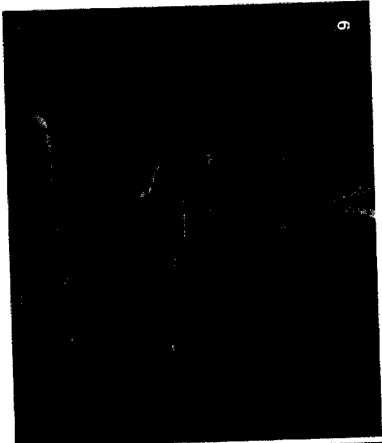


7

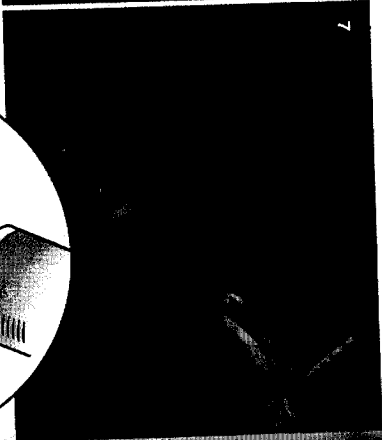

Step 7—Place the handle end of the bar in the forge, and heat the center of the bar to an orange heat. Using tongs, transfer the piece from the fire to the workbench and clamp it in the vise. Place a 90-degree bend in the center.

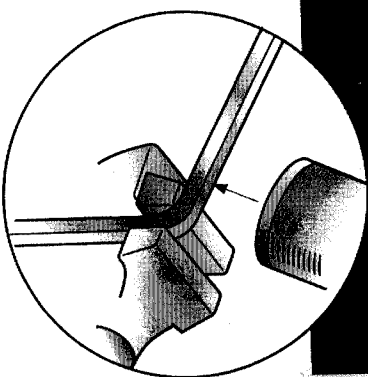


8

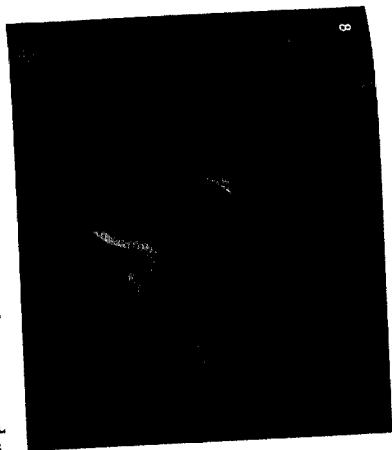


Step 8—Grasp the piece with tongs and reheat it. Without touching the hot metal, forge a T-handle in one end by bending the bar over the horn of the anvil. Make sure the handle is big enough for all of your fingers to fit comfortably inside without touching or grazing the hot Dutch oven.

Step 9—Reheat the shaft and apply a decorative twist, then true up the shaft again, if needed.



9a

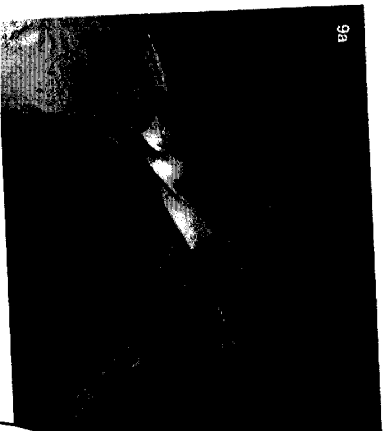

9b

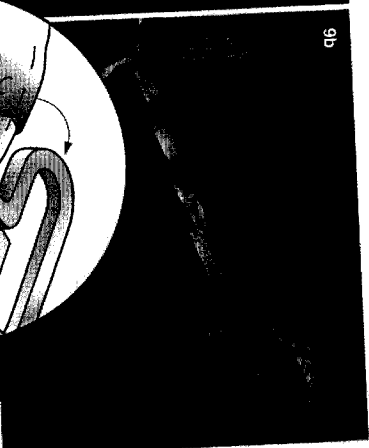

Step 10—Wearing gloves to protect your hands from the still-warm metal, rub a candle stub over the finished piece to preserve your work. Just before the wax cools, remove the excess with a rag.

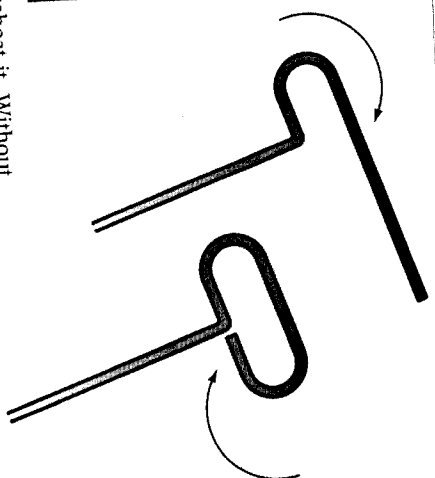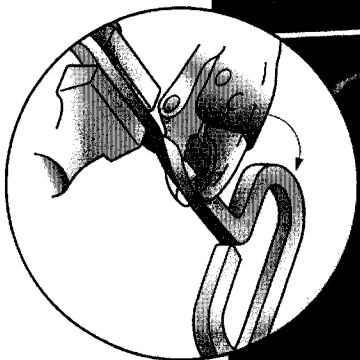

Forging a Dutch Oven Trivet


Step 1—Cut three 7-inch pieces of $\frac{1}{2}$ -inch by $\frac{1}{4}$ -inch mild steel.

Step 2—Heat the tip of one piece to an orange heat and clamp the bottom half inch in the vise. Bend the tip over the edge of the vise in a 90-degree angle. Cool the piece.

Step 3—Reheat the piece, then hook the bends under the vise jaw and bend them upward like an elephant with a raised trunk to form the foot of the trivet.

Step 4—Repeat steps 2 and 3 with the other two pieces. Be careful to make all three pieces the same shape and size so the legs of the finish piece will nest correctly. Allow the pieces *air-cool* for at least an hour. (Cooling in water will make the metal too hard to drill.)

Step 5—Stack the pieces and clamp them firmly together. Use the center punch to place a mark in the center of the bar, about a half inch from the unbent ends. Use vise grips to hold the punch steady, then make a dimple in the top piece by giving the punch a solid blow with a mallet.

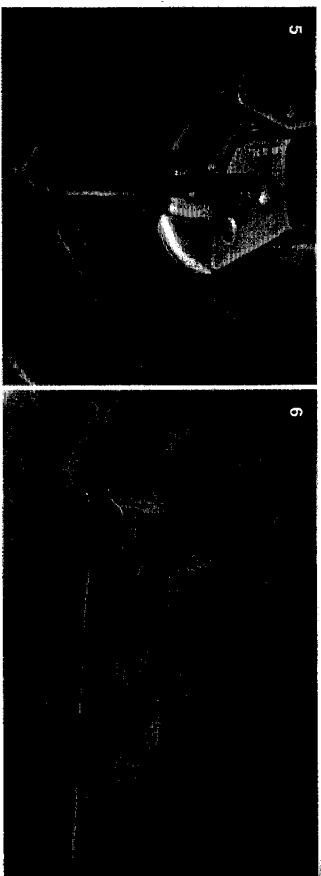

Step 6—Lubricate the dimple with a drop of oil and, using the mark as a guide to keep the drill bit from wandering, drill a hole through the first piece. To ensure that the holes in all three pieces will line up, stack the second piece under the first and use a nail to make a tiny mark to guide drilling the second piece. Stack those two pieces on the third piece and mark it. Then drill a hole in piece three. This method ensures that all three holes line up and that the legs will nest correctly.

Step 7—Stack the three pieces and slide a nail through the hole. Use a file or another nail to mark the shaft about $\frac{1}{16}$ inch above the top of the hole.

Step 8—Clamp the shank of the nail in a vise and use a hacksaw to cut it at the mark.


Step 9—Take the trivet pieces to the anvil and slide the nail into place.

Using the peen end of a ball peen hammer, strike in a circle around the protruding shaft of the nail, creating a mushroom shape. This is called “upsetting” the metal because the metal is thickened and shortened on the end. Gradually increase the size of the mushroom until the rivet has thickened enough to keep the legs firmly attached without any wobbling.

Step 10—Heat the trivet a little in the forge, and then lubricate the trivet with wax to prevent it from rusting.



Don't overdo it here—you don't want to thicken the rivet's shank so much that the legs are locked in place, making it impossible to pivot the legs around the rivet. You want the legs free to rotate so that the three legs of the trivet can be nested together and stored inside a Dutch oven.

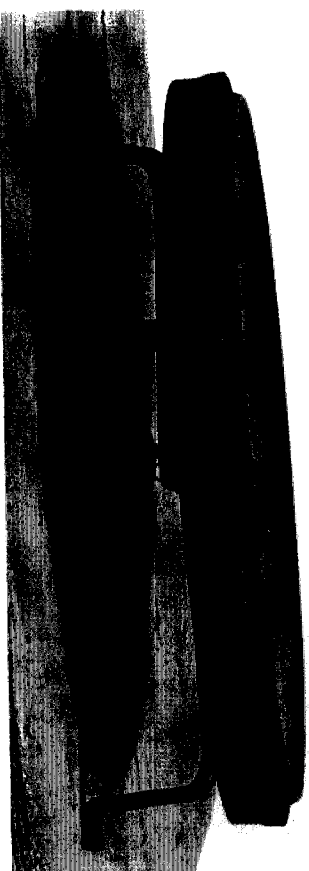

Spread the trivet's legs to use the lid of the Dutch oven as a frying pan. Fold the legs and place the trivet in the Dutch oven for storage.


Careers in Metalworking

Master metalworkers have their choice of many interesting hands-on careers, including gunsmiths, welders, founders, and sheet metal mechanics. Other metalworking careers, while not as hands-on, require a background and extensive knowledge in metalworking, including structural engineers and architects.

Basic Skills of a Metalworker

While the four metalworking disciplines described in this pamphlet—tinsmith, silversmith, founder, and blacksmith—are quite diverse, the basic skills a worker in each specialty needs are the same.

Metalworkers should be strong in basic math skills, including geometry, and they should have good verbal and written communication skills. The hands-on nature of the work requires good hand-eye coordination, attention to detail, and an interest in precision. A metalworker's logic skills should be sharp, because he needs to be able to break down a complex task into a logical sequence of steps. Creativity and a good eye for balance, conceptualization, composition, and other qualities of an artist are positives for metalworkers, too.

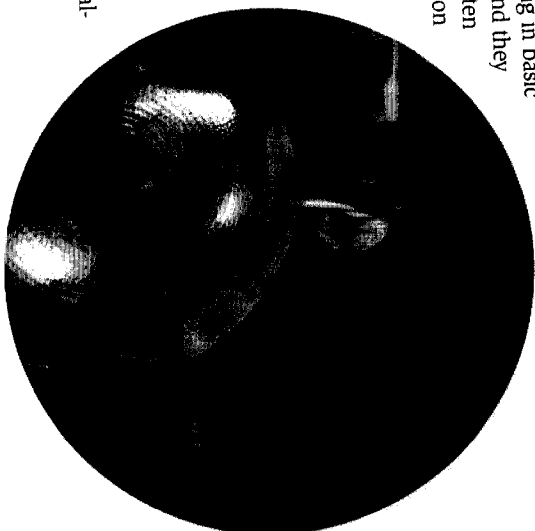


Education and Career Paths

Many metalworkers need a high school education, followed by vocational school or an apprenticeship, to become professional hands-on metalworkers. Some may choose to work for a shipyard, an automobile-parts manufacturing plant, or an aircraft manufacturing plant. Others may decide to work for large machine shops that specialize in rebuilding engines or manufacturing specialty parts for other companies. Still others may decide to become sheet metal workers, who manufacture heating and air conditioning items used in the construction of private homes, manufacturing plants, and office buildings.




Some professionals with interests in metalworking earn college degrees in mechanical, structural, or metallurgical engineering. They will tackle such projects as designing bridges or creating specialty metals in a steel mill or an aluminum-producing facility. An engineer who is familiar with the properties of metals might find a good career in the automobile, shipbuilding, aircraft, petroleum, defense, or parts-manufacturing industry.

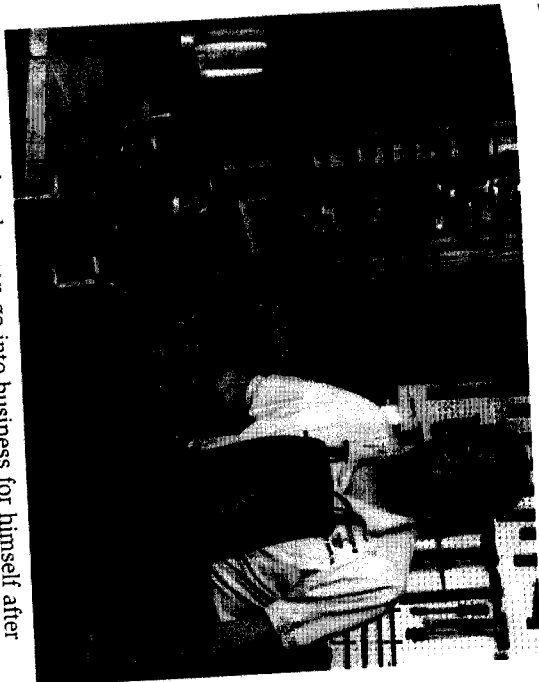

Any metalworker can go into business for himself after learning the trade as an apprentice. Successful metalworking entrepreneurs are those who learn to balance their creative side with their practical business side. Some of these successful entrepreneurs make and sell architectural hardware to construction companies, or create fanciful and imaginative sculptures and décor for banks, law offices, and other professional buildings.

Many professional associations, such as the Artist Blacksmith's Association of North America and the Society of American Silversmiths, can give you advice on pursuing a metalworking career. If you are considering such fields as sheet metal mechanic, machinist, or welder, visit a local metalwork shop or workers' union and ask about apprenticeships or on-the-job training opportunities.

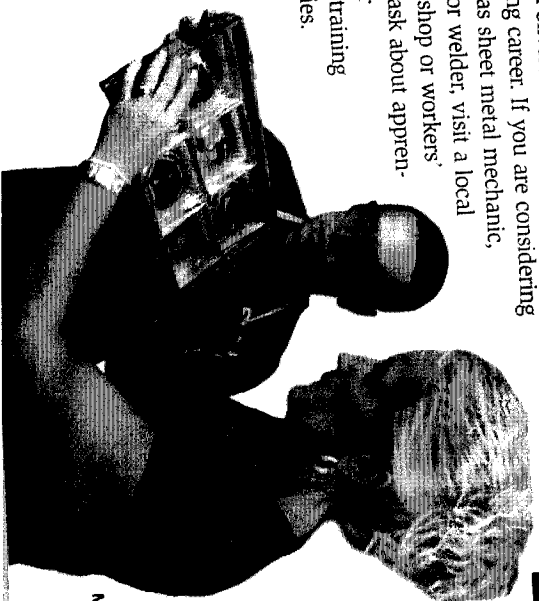

an understanding of the strengths, limitations, and metallurgical properties of typical metals used in the craft.

High school courses that will help prepare a future metalworker include art, math, and science. Perhaps the most basic knowledge a metalworker can acquire is

Glossary

alloy. A substance having metallic properties and being composed of two or more chemical elements of which at least one is an elemental metal.

annealing. A treatment consisting of heating to and holding at a suitable temperature followed by cooling at a suitable rate, used primarily to soften metals but also to simultaneously produce desired changes in other properties.

anvil. A heavy iron block with a steel face upon which metal is shaped with a hammer.

bench pin. A rectangular wooden board clamped to a workbench used by jewelers to control a piece when using a jeweler's saw or needle file.

blackening. The act of applying carbon such as candle soot to a metal mold or applying graphite dust to a rubber mold. The carbon acts as a releasing agent, making it easier to extract the cooled casting from the smaller recesses of the mold.

bouge. The curved portion of a plate or a tray from the edge of the rim to the bottom of the plate or tray.

brazing. Joining metals by flowing a thin layer (capillary thickness) of nonferrous filler metal into the space between them. Bonding results from the contact produced by the dissolution of a small amount of base metal in the molten filler metal without fusion of the base metal. Sometimes the filler metal is put in place as a thin solid sheet or as a clad layer, and the composite is heated, as in furnace brazing. The term brazing is used where the temperature exceeds some arbitrary value, such as 800 degrees; the term soldering is used when the temperature is lower than the arbitrary value.

casting. (1) An object at or near finished shape obtained by solidification of a substance in a mold. (2) Pouring molten metal into a mold to produce an object of a desired shape.



oxidation. A thin layer of rust or corrosion that forms on the surface of unprotected metal because of the metal's interaction with oxygen in the atmosphere.

parting line. The horizontal line formed where the two halves of a two-piece mold meet. A parting line is often placed at an object's halfway point when viewing the object from the side.

pattern. (1) A three-dimensional model used for making the cavity in a mold into which molten metal is to be poured to form a casting. (2) A piece of stiff paper or light-gauge sheet metal that has been cut to conform to the outlines of a component part of a sheet metal project. The craftsperson then traces the paper or metal pattern's outline onto the sheet metal from which the component part is to be constructed.

pickling solution. Any of various baths used to clean metal. One of the pickles used by silversmiths is a 10 percent sulfuric acid, 90 percent water solution. A pickling solution is most often used to remove the metal oxide that has formed on the surface of silver. Pickling solutions also will remove the flux used to solder seams.

planishing. The process of hammering or refining a metal surface.

platewell. The flat bottom of a tray or plate into which the bouge runs.

quench. To cool (as in heated metal) by immersion (as in oil or water).

raising. The process of creating a hollow form from a flat sheet of metal by forming it over a cast-iron stake.

rivet. A mechanical fastener that is hammered in place.

rolling. The technique of creating rounded shapes, performed either using an anvil or a slip-form roller.

seaming. Connecting two pieces of sheet metal without welding. Seams are soldered or brazed to ensure that the joint remains together.

sinking. The process of creating a concave shape from a flat piece of metal by hammering the metal over the top of a shaped form (sinking block).

smelting. A metalworker's term for exposing ore-bearing rocks to high temperature to separate the metal from the rock.

sprue. The hole through which metal is poured into the mold during the casting process.

soldering. Similar to brazing, but the filler metal has a melting temperature range below an arbitrary 800 degrees. Soft solders (low melting point) are usually lead-tin alloys, although pure-tin solders are available and are recommended.

stake anvil. A polished cast-iron or steel tool placed in a vise and used during the forming and planishing of metal.

steel. Commercial iron that contains carbon in any amount up to about 1.7 percent as an essential alloying constituent, is malleable under suitable conditions, and is distinguished from cast iron by its malleability and lower carbon content.

tempering. The process of relaxing the brittleness of a water- or oil-hardened steel by reheating it at a lower temperature.

tumbling. The process of alternately rolling and hammering the end of a bar of hot metal to forge a taper.

twisting. The process of making a decorative spiral in square, hexagonal, or octagonal metal.


vents. Small tunnels placed in molds to conduct air out of a mold during the casting process. Unless vented, trapped air has nowhere to go and its presence will prevent the molten metal from flowing into portions of the mold.

work hardening. The process of hardening a metal by hammering it.

yield point. The point at which a crystal under pressure has been transformed to such a state that, when the transforming pressure is released, the crystal cannot return to its original condition.

Metalwork Resources

The resources listed below represent only a fraction of those available to the hobby metalworker. Check the local library and bookstores for additional titles, and don't be afraid to purchase out-of-print titles or titles with older copyright dates—the majority of metalworking techniques are timeless.

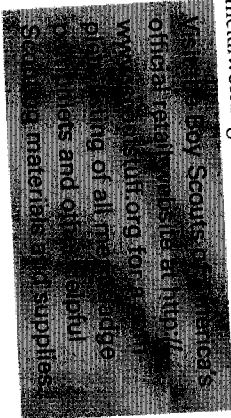

Books

Metalworking

- Almeida, Oscar. *Metalworking*. Drake Publishers Inc., 1971.
- McCreight, Tim. *The Complete Metalsmith: An Illustrated Handbook*. Davis Publications, 1991.
- Walker, John R. *Modern Metalworking*. 9th ed. Goodheart-Willcox Company Inc., 2004.

Metal Can Craft

- Hansson, Bobby. *The Fine Art of the Tin Can*, revised ed. Lark Books, 2005.

- Maguire, Mary. *Tin Crafts: Over 20 Projects for the Home*. Lorenz Books, 1999.

Tinsmithing/Tinware

- DeVoe, Shirley Spaulding. *The Art of the Tinsmith—English and American*. Schiffer Publishing Ltd., 1981.
- Handsberg, Ejner. *Shop Drawings of Shaker Iron and Tinware*. Berkshire House Publishing, 1993.

Silversmithing

- Finegold, Rupert, and William Seitz. *Silversmithing*. Iola, Wisconsin: Krause Publications, 1997.

- McCreight, Tim. *Jewelry: The Fundamentals of Metalsmithing*. Hand Books Press, 1997.

- . *The Metalsmith's Book of Boxes and Lockets*. Hand Books Press, 1999.

Metal Casting

- Amnen, C. W. *The Complete Book of Bronze Casting*. Tab Books Inc., 1985.
- McCreight, Tim. *Practical Casting*. Brynmorgan Press, 1994.

Blacksmithing

- Andrews, Jack. *The New Edge of the Anvil*. Skipjack Press, 1994.

- Blandford, Percy. *Practical Blacksmithing and Metalworking*. McGraw-Hill Professional, 1988.

- Sims, Lorelei. *The Backyard Blacksmith*. Quarry Books, 2006.

- Weygers, Alexander G. *The Complete Modern Blacksmith*. Ten Speed Press, 1997.

Organizations and Websites

Artist-Blacksmith's Association of North America

- Website: <http://www.abana.org>

The ArtMetal Resource to Metalworking

- Website: <http://www.artmetal.com>

Metal Museum

- Website: <http://www.metalmuseum.org>

Society of American Silversmiths

- Website: <http://www.silversmithing.com>

Materials and Supplies

Rio Grande

- Toll-free telephone: 800-545-6566

- Website: <http://www.riogrande.com>

Shor International Corporation

- Telephone: 973-520-8777

Website:

- <http://www.shorinternational.com>

Stebgo Metals

- Toll-free telephone: 800-289-0138

- Website: <http://www.stebgo.com>

Widget Supply

- Telephone: 541-926-1003

- Website: <http://www.widgetsupply.com>

Casting Metal, RTV Silicone, Premade Molds Castings

- Toll-free telephone: 888-429-1707

Website:

- <http://www.miniaturemolds.com>

The Dunken Company Inc.

- Toll-free telephone: 800-544-6653

- Website: <http://www.dunken.com>

Centaur Forge

- Burlington, WI 53105-0340

- Toll-free telephone: 888-878-1887

- Website: <http://www.centaurforge.com>

Acknowledgments

This edition of the *Metalwork* merit badge pamphlet was written by Eagle Scout Andrew G. Hagemann, Newport News, Virginia. The Boy Scouts of America is grateful to Mr. Hagemann for volunteering his time and expertise to this project. He also opened his amazing workshop for a photo shoot.

The author wishes to thank Christian Hagemann, Fremont, Nebraska, for his kind help with the tinsmith chapter. Chris has fond memories of his Scouting experiences as a youth. He is now a Master Gunsmith and self-taught tinsmith. Thanks to Chris for providing the pattern for the drinking cup. Without his help, a tinsmith chapter would not have been possible.

Thanks to the following contributors for sharing their resources and expertise:

- Jack Andrews
- The Castings Company
- Doug Learn and the Artist-Blacksmith's Association of North America
- Stewart Marshall, Queen's Scout
- Timothy McCreight
- Dezzo and Desmond Rubesch

A special thanks to Kenneth Hampton, Eagle Scout 1952, for his invaluable assistance with the how-to drawings used in the pamphlet.

The Boy Scouts of America also gratefully acknowledges the assistance of the Colonial Virginia Council, Newport News, Virginia.

The Boy Scouts of America is grateful to the men and women serving on the Merit Badge Maintenance Task Force for the improvements made in updating this pamphlet.

Photo and Illustration Credits

Andrew G. Hagemann, courtesy—cover (*unutil.*); pages 10 (*top*) and 49 (*bottom*)

©Photos.com—cover (*turquoise pin.*); pages 9 (*all*), 10 (*bottom*), 12–13, 24, 34 (*plane, car, background*), 35, 47 (*all*), 52 (*top*), 56 (*top*), 59 (*bottom*), 60 (*all*), 78, 84–86 (*all*), and 92

Wikipedia.org, courtesy—page 11

All other photos and illustrations not mentioned above are the property of or are protected by the Boy Scouts of America.

John McDeamon—pages 25–27 (*illustrations*), 38 (*patterns*), 42–45 (*all patterns and illustrations*), 52 (*illustrations*), 55 (*all*), 58–59 (*illustrations*), 67–68 (*all*), 74 (*center, both*), and 80–81 (*all illustrations*)

Brian Payne—pages 56 (*bottom*) and 87 (*bottom*)

MERIT BADGE LIBRARY

Though intended as an aid to Boy Scouts, Varsity Scouts, and qualified Venturers and Sea Scouts in meeting merit badge requirements, these pamphlets are of general interest and are made available by many schools and public libraries. The latest revision date of each pamphlet might not correspond with the copyright date shown below, because this list is corrected only once a year, in January. Any number of merit badge pamphlets may be revised throughout the year; others are simply reprinted until a revision becomes necessary.

If a Scout has already started working on a merit badge when a new edition for that pamphlet is introduced, he may continue to use the same merit badge pamphlet to earn the badge and fulfill the requirements therein. In other words, the Scout need not start over again with the new pamphlet and possibly revised requirements.

Merit Badge Pamphlet	Year	Merit Badge Pamphlet	Year	Merit Badge Pamphlet	Year
American Business	2013	Entrepreneurship	2013	Pioneering	2013
American Cultures	2013	Environmental Science	2006	Plant Science	2014
American Heritage	2013	Family Life	2005	Plumbing	2012
American Labor	2006	Farm Mechanics	2008	Pottery	2008
Animal Science	2014	Fingerprinting	2003	Programming	2013
Archaeology	2014	Fire Safety	2004	Public Health	2005
Archery	2013	First Aid	2007	Public Speaking	2013
Architecture and Landscape Architecture	2010	Fish and Wildlife Management	2004	Pulp and Paper	2006
Art	2013	Fishing	2004	Radio	2013
Astronomy	2013	Fly-Fishing	2009	Railroading	2013
Athletics	2006	Fostery	2005	Reading	2003
Automotive Maintenance	2012	Game Design	2013	Reptile and Amphibian Study	2005
Aviation	2014	Gardening	2013	Rifle Shooting	2012
Backpacking	2007	Geology	2005	Robotics	2011
Basketry	2003	Geocaching	2010	Safety	2014
Bird Study	2005	Geology	2005	Salesmanship	2013
Bugling (see Music)	2011	Golf	2002	Scholarship	2014
Camping	2004	Graphic Arts	2013	Scouting Heritage	2014
Canoing	2004	Hiking	2007	Scuba Diving	2009
Ceramics	2004	Home Repairs	2012	Sculpture	2007
Chess	2011	Horseshow	2013	Search and Rescue	2012
Cinematography (see Moviemaking)	2008	Indian Lore	2008	Shotgun Shooting	2013
Citizenship in the Community	2005	Insect Study	2010	Skating	2004
Citizenship in the World	2005	Inventing	2006	Small-Boat Sailing	2014
Climbing	2011	Journalism	2006	Snow Sports	2004
Coin Collecting	2008	Kayaking	2012	Soil and Water Conservation	2013
Collections	2009	Landscaping Architecture (see Architecture)	2003	Space Exploration	2013
Communication	2006	Law	2003	Sports	2006
Composite Materials	2006	Leatherwork	2008	Stamp Collecting	2013
Computers (see Digital Technology)	2009	Lifesaving	2003	Surveying	2004
Cooking	2013	Mammal Study	2009	Sustainability	2008
Crime Prevention	2005	Medicine	2007	Swimming	2014
Cycling	2013	Metalwork	2010	Theater	2014
Dentistry	2006	Model Design and Building	2010	Traffic Safety	2006
Digital Technology	2013	Motorboating	2008	Truck Transportation	2005
Disabilities Awareness	2014	Music and Bugling	2013	Veterinary Medicine	2007
Dog Care	2012	Nature	2010	Weather	2013
Drafting	2008	Nuclear Science	2012	Weather	2012
Electricity	2013	Oceanography	2009	Whitewater	2005
Electronics	2004	Orienteering	2012	Wilderness Survival	2006
Emergency Preparedness	2012	Painting	2013	Wood Carving	2003
Energy	2005	Personal Fitness	2003	Woodwork	2011
Engineering	2008	Personal Management	2012		
		Pets	2013		
		Photography	2013		

BOY SCOUTS OF AMERICA • SUPPLY GROUP

NATIONAL DISTRIBUTION CENTER

2109 Westinghouse Boulevard
P.O. Box 7143
Charlotte, NC 28241-7143

DIRECT MAIL CENTER

P.O. Box 909
Pineville, NC 28134-0909
For fast credit card orders—
call BSA operators toll-free
1-800-323-0732